



Photo: Rigging Services, UK. Project Galleries Lafayette


StageDex is based on a special extruded aluminium profile. The top board is glued to the frame to reduce noise and vibration. All decks are available in metric and imperial sizes.

TOP LINE SERIE

- Internal reinforcement of corner
- Standard spigot entry on the topside of the deck to attach EasyRail system
- Birch plywood, water resistant quality
- Glued in 15mm wooden plate
- Non-slid hexagon layer
- loading capacity 750kg/m²

BASIC LINE SERIE

- Top option; Birch plywood, unfinished, indoor use only.
- Top option; Birch plywood, clear varnish, indoor use only.
- Top option; Birch plywood, black coating, indoor use only.
- No reinforced corner solution
- Glued in 15mm wooden plate
- loading capacity 750kg/m²

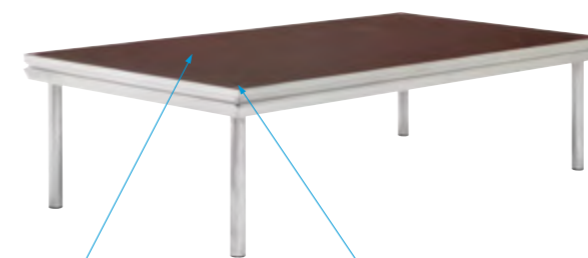

SM-D-T
Birch plywood non slid top layer, non permanent outdoor use




Topline frame, reinforcement corner



SM-DL-U
Birch plywood, unfinished, indoor use only



SM-DL-C
Birch plywood, clear varnish, indoor use only



SM-DL-B
Birch plywood, black coating, indoor use only