

EX3
TECHNOLOGY

CHAIN HOIST
CHAIN HOIST
CHAIN HOIST

CONTROLLER
CONTROLLER
CONTROLLER

SAFE • PRECISE • CERTIFIED



The brand name EXE® identifies a range of products designed for the entertainment & exhibition markets, offering a range of equipment engineered to safely manoeuvre stage equipment, scenery, video walls & other related structures...before, during and after your performance.



Managing increasingly complex events, led us to imagine a world where our most advanced series and third-party products interact with each other. It's a unique and ambitious project, that we called **ONE FOR ALL**: it's the open source system capable of interaction with third-party producers. A decisive step forward for the interaction of various technologies within the same event.

ALL FOR ONE is designed as a fully integrated system including 'smart' hoists and intelligent controllers, offering plug and play devices. It is the integration between equipment designed to operate as a 'single' stage machine

CHAIN HOIST

01 EXE RISE - ELECTRIC CHAIN HOIST D8+ S.F. 8:1	8
• Overview	8-9
• D8+ 250kg Medium Frame Ultra Compact	10-11
• D8+ 350kg Medium Frame Compact	12-13
• D8+ 500kg Medium Frame	14-15
• D8+ 1000kg Large Frame	16-17
• D8+ 2000kg Large Frame ^{2 REEVES}	18-19
• D8+ 1600kg Extra Large Frame Compact	20-21
• D8+ 2000kg Extra Large Frame ^{1 REEVE}	22-23
• D8+ 2500kg Extra Large Frame	24-25
• D8+ 250kg - 500kg Single Phase	26-27
02 EXE ACE - ELECTRIC CHAIN HOIST D8	30
• Overview	30-31
• D8 250kg Medium Frame Ultra Compact	32-33
• D8 500kg Medium Frame Compact	34-35
• D8 1000kg Medium Frame	36-37
• D8 2000kg Extra Large Frame Compact	38-39
03 EXE VARIO - ELECTRIC CHAIN HOIST D8+ VARIABLE SPEED	42
• Overview	43
• D8+ 500kg Variable Speed	44
• D8+ 1000kg Variable Speed	45
04 ACCESSORIES	46
• EXE Technology Safety Helmet	47
• Flight Case	48-49
• Chain Bag / Rain Cover	50-51
• Chain	52
• Chain Slider / Touring Slider	53
• Hook	54
• Upgrades	55
05 EXE HCB - MANUAL CHAIN HOIST	56
• EXE HCB - Hand Chain Block	57
06 EXE IBEAM - TROLLEY	58
• EXE IBEAM Trolley	59

CONTROLLER

01 EXE DRIVE - CONTROLLER	60
• Overview	61
• DH1 / DH2	62-63
• DB4 / DB4-LV	64-65
• DB8 / DB8-LV	66-67
• DL4 / DL4-LV	68-69
• DL8 / DL8-LV	70-71
• DL8H	72-73
• DL16 / DL16-LV	74-75
• DL24 / DL24-LV	76-77
• DW8	78-79
• DC4R / DC8R / DC4R-SP	80-81
• RHG / RHGR / RHGC	82-83
• RH4C / RH8C / RH16C / RH24C	84-85
• SP2-LV / RH1C-LV	86
• Compatibility Chart	87
02 EXE SENSE - TOUCHSCREEN CONTROLLER	88
• Overview	89
• Features	90-91
• DL85 V2 6U	92
• DLRH Remote control	93
• DL85-1 V2 6U CEE	95
• DL85-2 V2 6U CEE+HARTING wiring	96-97
• DL85-1 V2 6U CEE+SOCAPEX wiring	98-99
• Compatibility Chart	101

ALL FOR ONE SOLUTIONS



ALL FOR ONE - SYSTEMS OVERVIEW	102-103
• Overview	104-105
01 EXE B	106
02 EXE D	107
03 EXE X	108
04 EXE E	109
05 EXE K	110

EXE TECHNOLOGY

MILESTONES



DST40

EXE
RISE

2013

EXE
DRIVE

2014



LC-PRO
CONFIGURATION

EXE
RISE

2016



VARIABLE SPEED

EXE
DST

2018

EXE
DST

2014

SMALL AND
LARGE FRAME



DL & DB
PRODUCTS



EXE
CELL

WINNER OF THE
plasa 2015
AWARDS FOR INNOVATION

2015

MEDIUM
FRAME



EXE
VARIO

2017

DST52
DST66





EXTRA LARGE FRAME



MEDIUM FRAME COMPACT



MEDIUM FRAME
ULTRA COMPACT

EX3
DRIVE



EX3
FLEXA

2019

2020

2021

2022

2023

2024

EX3
RISE

EX3
RISE

EX3
RISE

WIRELESS CONTROLLER



ONE FOR ALL - ALL FOR ONE SOLUTIONS







EXE FLEXA LOAD CELLS



CHAIN HOIST

CASSIFICATION

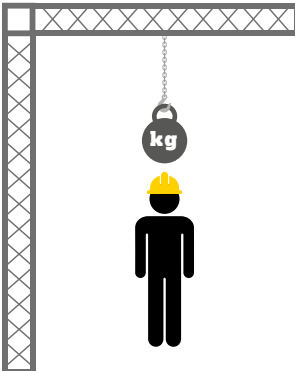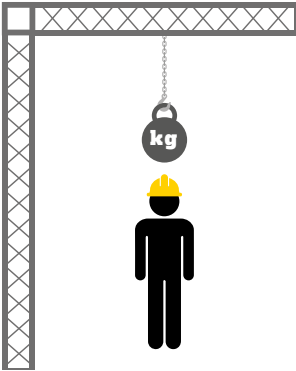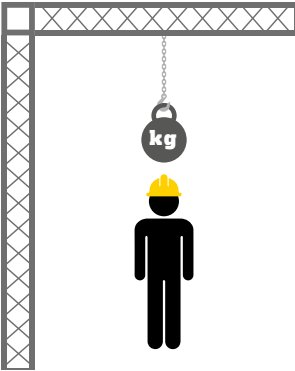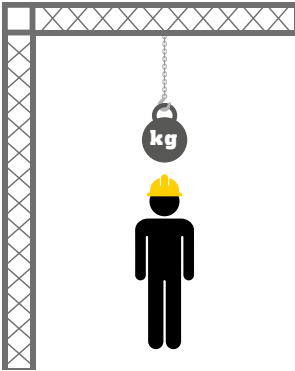	D8	D8 with secondary safety equipment	D8 Plus	C1
ASSEMBLY AND DISASSEMBLY				
LOAD HOLDING				

CHAIN HOIST

MECHANISM CASSIFICATION

VERTICAL MOVEMENTS						
ISO 4301	FEM 9.511	DUTY FACTOR OF MOTOR	MINUTES PER HOUR <i>Uniformly Distributed Work Period</i>	STARTS PER HOUR	HOUR PER DAY	HOUR / 10 YEARS Bearing Time
M1	1Dm	15%	9	90	≤ 0,25	400
M2	1Cm	20%	12	120	≤ 0,5	800
M3	1Bm	25%	15	150	≤ 1	1600
M4	1Am	30%	18	180	≤ 2	3200
M5	2m	40%	24	240	≤ 4	6300
M6	3m	50%	30	300	≤ 8	12500

RATE OF LOADING	Average time of supposed daily operation T_m (hour)		to 0.25	from 0.25 to 0.5	from 0.5 to 1	from 1 to 2	from 2 to 4	from 4 to 8	from 8 to 16
	Rate of loading Total operating Time (hour)		to 400	to 800	to 1600	to 3200	to 6300	to 12500	to 25000
LIGHT	When normally working with approx.. 1/3 of W.L.L. and rarely with W.L.L.	ISO FEM	--	M1 1Dm	M2 1Cm	M3 1Bm	M4 1Am	M5 2m	M6 3m
MEDIUM	When normally working with approx.. 1/3 to 2/3 of W.L.L. and sometime W.L.L.	ISO FEM	M1 1Dm	M2 1Cm	M3 1Bm	M4 1Am	M5 2m	M6 3m	M7 4m
HEAVY	When normally working with approx.. 2/3 of W.L.L. and often with W.L.L.	ISO FEM	M2 1Cm	M3 1Bm	M4 1Am	M5 2m	M6 3m	M7 4m	M8 5m
VERY HEAVY	When normally working with W.L.L. or near W.L.L.	ISO FEM	M3 1Bm	M4 1Am	M5 2m	M6 3m	M7 4m	M8 5m	--

CHAIN HOIST

FEATURES



SELF CLIMBING OR STANDARD SUSPENSION

Self climbing or Standard Suspension, without any adjustments required. Swivel hooks on the chain and body reduces the risk of chain twist and allows easy positioning.



BODY

The BODY is made in cast aluminium to be as light, yet as strong as possible. The matte black finish is corrosion resistant and non reflective.



CHAIN-BAG BRACKET

The CHAIN-BAG BRACKET allows the hoist to be used motor up or down. The design ensures the bag is positioned correctly to accept chain without the need for any adjustment, reducing the chance of chain spills.



EXTERNAL CHAIN GUIDE

Made from a special PVC is used to minimise the chance of chain jamming should the chain become twisted. This sacrificial plate helps protect both the chain and internal chain guides. (Extra Large body hoists are equipped with a steel guide plate).



CHAIN

CHAIN is a DAT type, RTS chain made of galvanized alloy steel grade 80 and complies with the standard DIN EN 818-7. Available in BLACK colour with T grade and DAT type. The quality is RTS and the surface is phosphate.




DOUBLE BRAKE & SINGLE BRAKE

DOUBLE BRAKE: EXE Rise are supplied with double brake as standard. The brakes are supplied as complete units which allows for trouble free use and quick and easy inspection.
SINGLE BRAKE: EXE Ace are supplied with single brake as standard



IRON AND ASBESTOS FREE BRAKE

IRON AND ASBESTOS FREE BRAKE shoes and stainless steel brake discs will not rust in the presence of moisture, preventing brake assemblies from seizing.



CLUTCH

Clutch outside the load path positioned on the motor shaft in front of the motor assembly. With this arrangement, the brakes will hold the load in the unlikely event of a clutch failure.



GEAR BOX

GEAR BOX is manufactured with a thicker aluminum wall, comparing to the rest of the body, to respond to the very stringent mechanical requirements.



BEARING GREASE

BEARING GREASE on medium and large frame and OIL on extra large frame. They are high load, designed for the effective lubrication and protection of plain bearings and sliding surfaces used in extreme environments, particularly in heavily loaded.

CHAIN HOIST

FEATURES



HANDLES

EXE Rise chain hoists have handles that work in either orientation. Regulations state handles shall be provided to make access to hoist the easy in any orientation.



LOAD WHEEL

All EXE Rise chain hoists have load wheels with 5 pockets; this ensures compliance with European standards and delivers a smooth, quiet movement. Load wheels are heat treated.



LOW OPERATIONAL NOISE

With just 67.5 dBA the EXE Rise chain hoist are very silent and now you can do take the quiet jobs.



HERTZ / VOLT

EXE Rise chain hoist technical data have been calculated considering European power and control supply 230/400VAC – 3 – 50Hz. On request it is possible to have technical data at the different power and control supply and at the different frequency values.



CE MARK

EXE Rise hoists are CE marked in accordance with the requirements of the machinery directive 2006/42/EC.



01

EXE
RISE

EXE RISE D8+ CHAIN HOIST FIXED SPEED, PERFORMANCE ORIENTED, MADE IN ITALY

Fixed speed D8+ EXE Rise chain hoists have been specifically designed to satisfy the demanding needs and requests of the entertainment and touring market. Years of research and development have contributed to an extremely performance-oriented, precise and safe range of hoists that see customer trust increasing exponentially all over the world.

The electrical-mechanical features and high quality components of the hoist body are made in Italy, making EXE Rise chain hoists unique and unmatched on the international market.

Corrosion resistant aluminium alloy frames, non-reflective matte finish, housing a 5 pocket load wheel, complete double-brake units, and a clutch positioned outside of the load path. High quality D-A-T, case hardened steel chain either zinc plated, or black phosphated. Alloy steel swivel hooks with spring-loaded latches and the working load limit boldly marked at the chain hook.

All EXE Rise chain hoists are D8 plus with a safety factor of 8-to-1 and can be ordered with either direct or low voltage control. Compatibility with all EXE Drive and EXE Sense motor controllers, and the possibility of equipping them with an encoder, limit switch and load cell, allow EXE Rise chain hoists to meet all of our customers needs.

Overview

EXE RISE D8+ FIXED SPEED CHAIN HOISTS

1 FALL

DIRECT CONTROL

LOW VOLTAGE CONTROL

MEDIUM FRAME ULTRA COMPACT	MEDIUM FRAME COMPACT	MEDIUM FRAME	LARGE FRAME 1 REEVE	EXTRA LARGE FRAME COMPACT	EXTRA LARGE FRAME	
250kg	350kg	500kg	1000kg	1600kg	2000kg	2500kg
						
						

+

+

+

+

+

+

+

2 FALL

DC / LVC

DOUBLE REEVE PULLEY			DOUBLE REEVE PULLEY / CHAIN HOOK	DOUBLE REEVE CHAIN HOOK		
						
2x WLL						

CHAIN HOIST

EXE
RISE

□ **D8+ 250kg**

MEDIUM FRAME ULTRA COMPACT





GENERAL FEATURES

MODEL	EXE Rise chain hoist D8+ 250kg DC
TYPE OF CONTROL	Direct
FEM CLASS	2m
DUTY FACTOR	40%
START PER HOUR	240
BEARING TIME / 10 YEARS	6300h
FALLS OF CHAIN	1
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	5x15 mm
CHAIN SELF-WEIGHT	0.54 kg/m
SAFETY FACTOR	8:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	75 ± 5 cm

The **EXE Rise D8+ 250kg Medium Frame Ultra Compact chain hoist** is made from extremely light cast aluminum. Its low profile frame makes it ideal for squeezing into small spaces and achieving the greatest possible headroom in low-ceiling venues. This lightweight, compact hoist is ideal for wedding receptions, corporate event venues, and for simple rigs in educational, religious or theatrical settings.

EXE RISE D8+ 250kg

MEDIUM FRAME ULTRA COMPACT

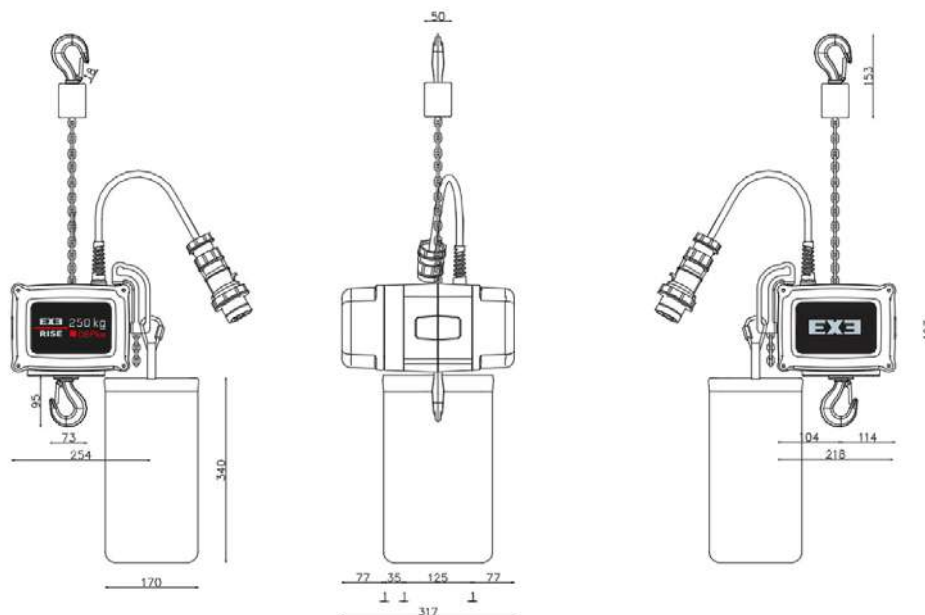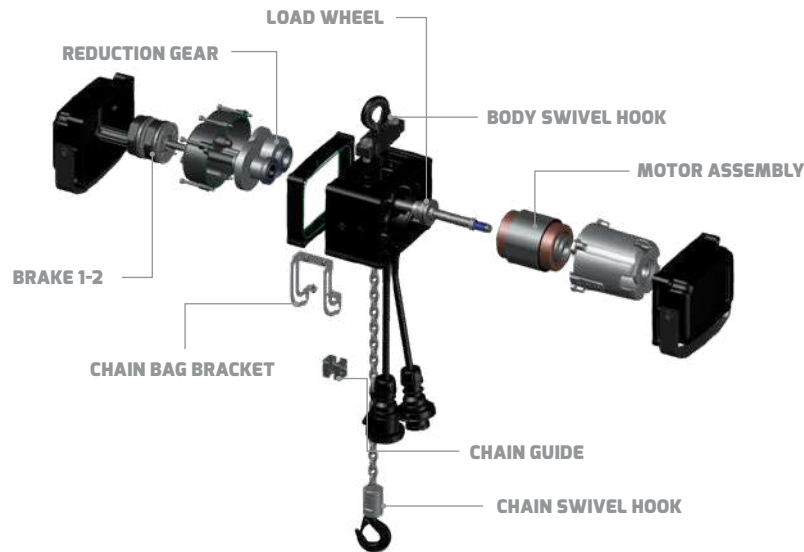

The values are reported in **mm**.

DIRECT CONTROL

WORKING LOAD LIMIT	250 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	0.36 kW
OPERATING VOLTAGE Δ /Y	230/400 VAC - 3 - 50 Hz
3PH CURRENT	Δ 1.84 A - Y 1.06 A
Δ POWER SUPPLY CONNECTOR (*)	CEE 16A 9h 230VAC - 3PH + G plug
Y POWER SUPPLY CONNECTOR	CEE 16A 6h 400VAC - 3PH + G plug
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	2
DC BRAKE SIZE	06
DC BRAKE POWER	20 W
DC BRAKE OPERATING VOLTAGE	103 VDC
DC BRAKE RATED TORQUE	4 Nm
DC BRAKE RATED TORQUE REDUCTION AT THE SPEED SPECIFICATION x %	87% (1500 r/min)
DC BRAKE GAP (SL)	0.2 mm
LIMIT SWITCH (*)	2 positions
ENCODER (*)	Incremental or Absolute
SELF-WEIGHT	19.5 kg

D8+ 198KG MODEL ALSO AVAILABLE



OTHER OPERATING VOLTAGE & FREQUENCY ARE AVAILABLE



EXE
RISE
☐ **D8+ 350kg**
MEDIUM FRAME COMPACT


GENERAL FEATURES

MODEL (*)	EXE Rise chain hoist D8+ 350kg DC/LVC
TYPE OF CONTROL	Direct or Low Voltage
FEM CLASS	2m
DUTY FACTOR	40%
START PER HOUR	240
BEARING TIME / 10 YEARS	6300h
FALLS OF CHAIN	1
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	5x15 mm
CHAIN SELF-WEIGHT	0.54 kg/m
SAFETY FACTOR	8:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	75 ± 5 cm

(*) Also available 250kg FEM CLASS 3m

The **EXE Rise D8+ 350kg Medium Frame Compact chain hoist** is made from extremely light cast aluminum. Its low profile frame makes it ideal for squeezing into small spaces and achieving the greatest possible headroom in low-ceiling venues. This lightweight, compact hoist is ideal for wedding receptions, corporate event venues, and for simple rigs in educational, religious or theatrical settings.

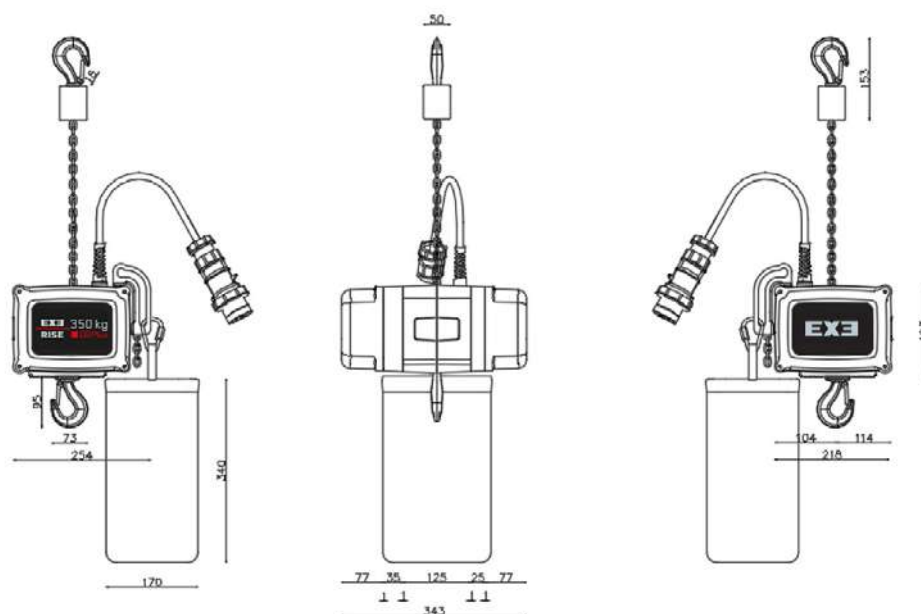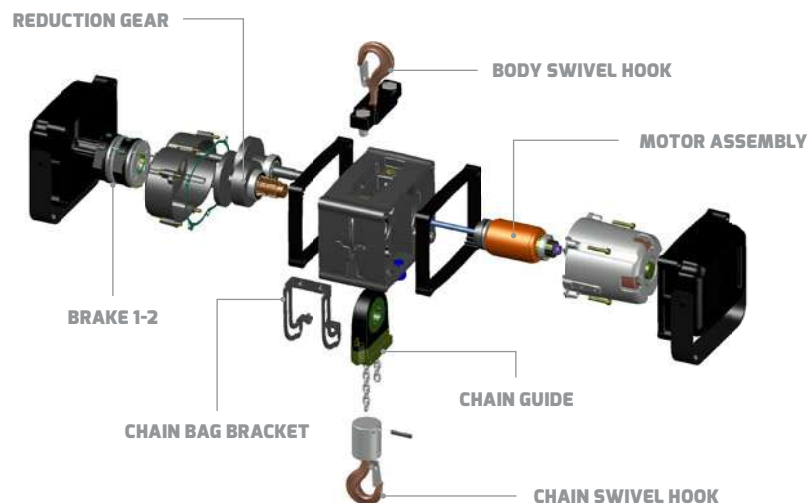

The values are reported in **mm**. DC model has only one cable.

EXE RISE D8+ 350kg

MEDIUM FRAME COMPACT


DIRECT CONTROL

WORKING LOAD LIMIT	350 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	0.5 kW
OPERATING VOLTAGE Δ /Y	230/400 VAC - 3 - 50 Hz
3PH CURRENT	Δ 2.94 A - Y 1.70 A
Δ POWER SUPPLY CONNECTOR (*)	CEE 16A 9h 230VAC - 3PH + G plug
Y POWER SUPPLY CONNECTOR	CEE 16A 6h 400VAC - 3PH + G plug
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	2
DC BRAKE SIZE	06
DC BRAKE POWER	20 W
DC BRAKE OPERATING VOLTAGE	103 VDC
DC BRAKE RATED TORQUE	4 Nm
DC BRAKE RATED TORQUE REDUCTION AT THE SPEED SPECIFICATION x %	87% (1500 r/min)
DC BRAKE GAP (SL)	0.2 mm
LIMIT SWITCH (*)	2 positions
ENCODER (*)	Incremental or Absolute
SELF-WEIGHT	DC: 21.5 kg LVC: 23kg

LOW VOLTAGE CONTROL

CONTROL SUPPLY CONNECTOR	CEE 16A 4h 24VAC - 3PH + G black socket
LIMIT SWITCH	2 positions

(*) only on request

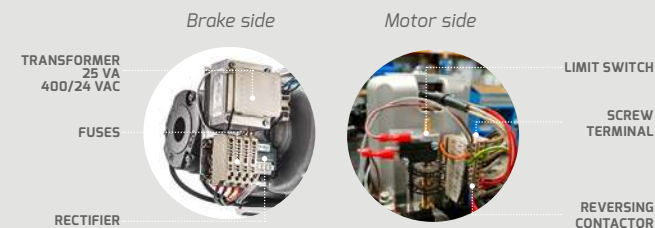

OTHER OPERATING VOLTAGE & FREQUENCY ARE AVAILABLE

EXE
RISE

□ **D8+ 500kg**



MEDIUM FRAME



GENERAL FEATURES

MODEL	EXE Rise chain hoist D8+ 500kg
TYPE OF CONTROL	Direct or Low Voltage
FEM CLASS	2m
DUTY FACTOR	40%
START PER HOUR	240
BEARING TIME / 10 YEARS	6300h
FALLS OF CHAIN	1
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	6x18 mm
CHAIN SELF-WEIGHT	0.78 kg/m
SAFETY FACTOR	8:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	75 ± 5 cm

The **EXE Rise D8+ 500kg Medium Frame chain hoist** is made from extremely light cast aluminum. It is small, but mighty with a self-weight of only 24kg. That's a lifting power of 20 times its self-weight making it ideal for soundstages, nightclubs, exhibition halls, concert halls, amphitheatres and other outdoor venues

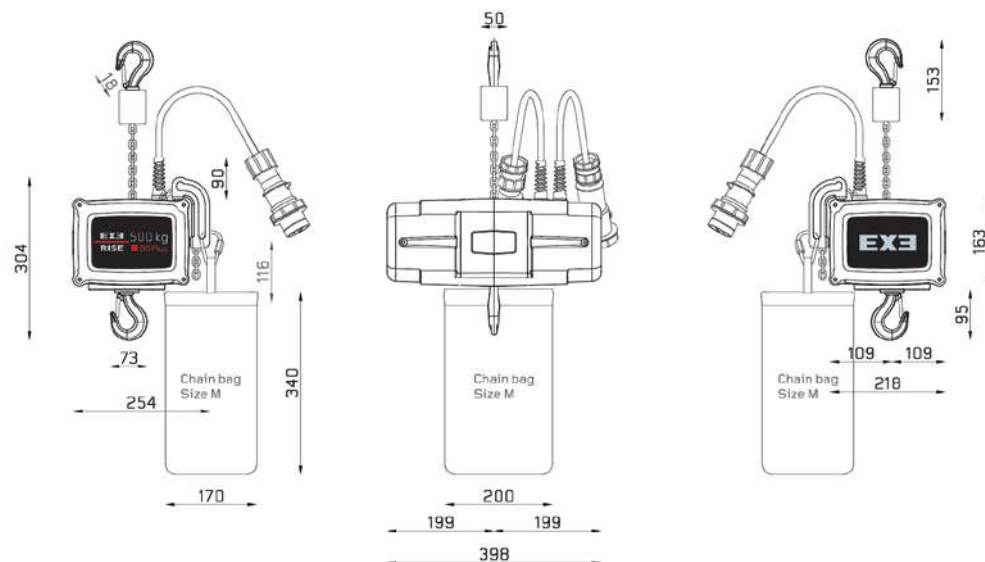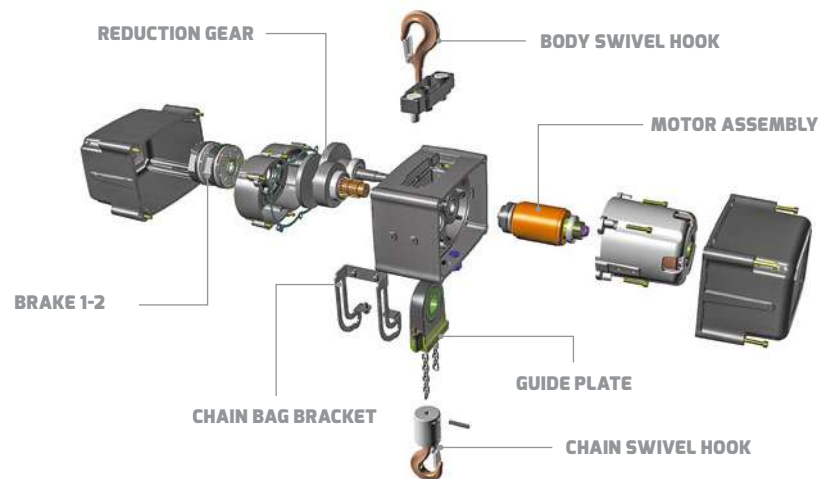

The values are reported in **mm**. DC model has only one cable.

EXE RISE D8+ 500kg

MEDIUM FRAME


DIRECT CONTROL

WORKING LOAD LIMIT	500 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	0.8 kW
OPERATING VOLTAGE Δ /Y	230/400 VAC - 3 - 50 Hz
3PH CURRENT	Δ 3.93 A - Y 2.27 A
Δ POWER SUPPLY CONNECTOR (*)	CEE 16A 9h 230VAC - 3PH + G plug
Y POWER SUPPLY CONNECTOR	CEE 16A 6h 400VAC - 3PH + G plug
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	2
DC BRAKE SIZE	06
DC BRAKE POWER	20 W
DC BRAKE OPERATING VOLTAGE	103 VDC
DC BRAKE RATED TORQUE	4 Nm
DC BRAKE RATED TORQUE REDUCTION AT THE SPEED SPECIFICATION x %	87% (1500 r/min)
DC BRAKE GAP (SL)	0.2 mm
LIMIT SWITCH (*)	2 positions
ENCODER (*)	Incremental or Absolute
SELF-WEIGHT	24 kg

LOW VOLTAGE CONTROL

CONTROL SUPPLY CONNECTOR	CEE 16A 4h 24VAC - 3PH + G black socket
LIMIT SWITCH	2 positions

(*) only on request

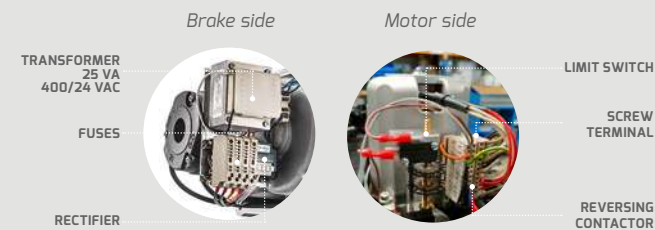

OTHER OPERATING VOLTAGE & FREQUENCY ARE AVAILABLE

EXE
RISE

□ **D8+ 1000kg**

LARGE FRAME



EXE
RISE 1000kg
■ **D8 Plus**



GENERAL FEATURES

MODEL	EXE Rise chain hoist D8+ 1000kg
TYPE OF CONTROL	Direct or Low Voltage
FEM CLASS	2m
DUTY FACTOR	40%
START PER HOUR	240
BEARING TIME / 10 YEARS	6300h
FALLS OF CHAIN	1
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	8x24 mm
CHAIN SELF-WEIGHT	1.39 kg/m
SAFETY FACTOR	8:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	75 ± 5 cm

The **EXE Rise D8+ 1000kg Large Frame chain hoist** single fall hoist is made by gravity casting is durably designed for a heavy duty life cycle. This hoist is everlasting with proper care and maintenance, which makes it ideal for the rugged life on-tour. It is a fantastic option for heavier grid systems often seen in festivals, outdoor venues, arenas, and film sets.

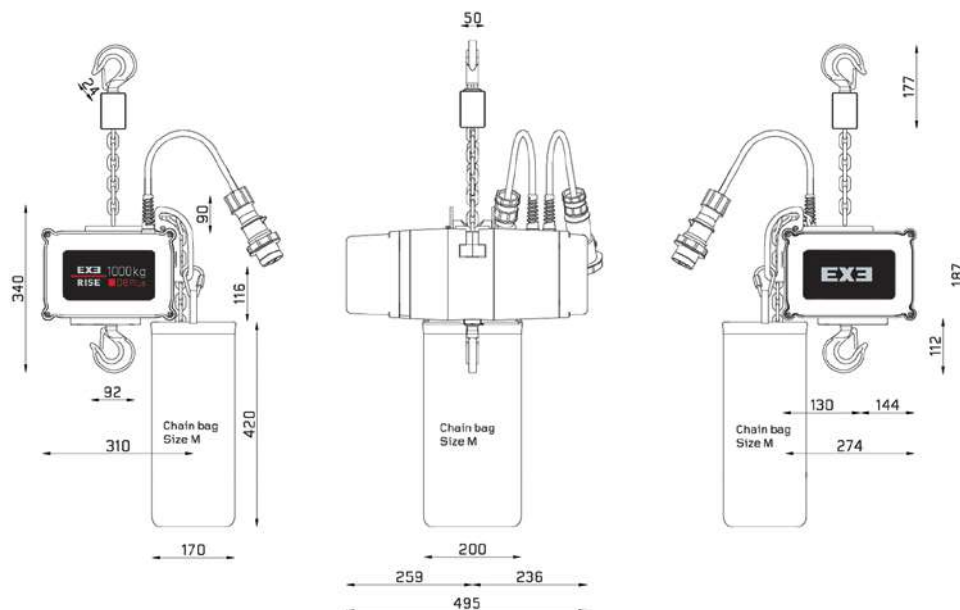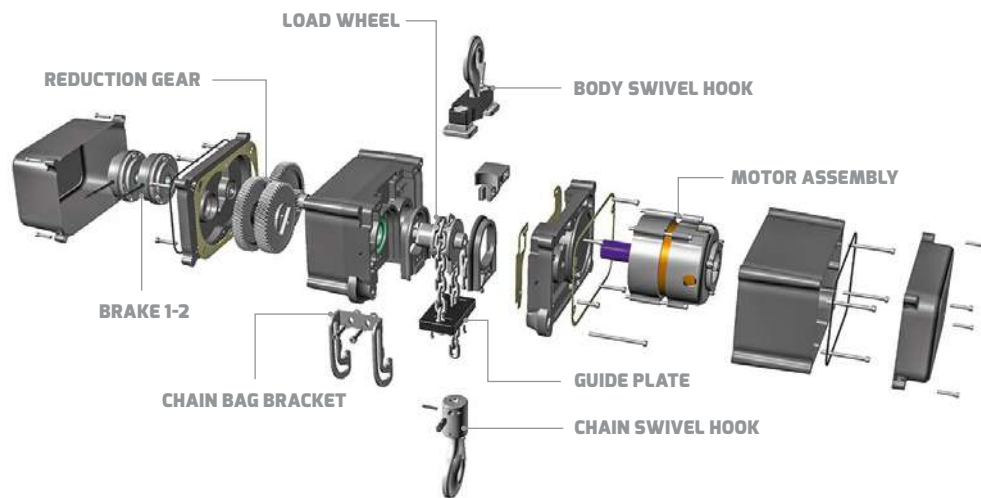

The values are reported in **mm**. DC model has only one cable.

EXE RISE D8+ 1000kg

LARGE FRAME


DIRECT CONTROL

WORKING LOAD LIMIT	1000 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	1.0 kW
OPERATING VOLTAGE Δ /Y	230/400 VAC - 3 - 50 Hz
3PH CURRENT	Δ 4.62 A - Y 2.67 A
Δ POWER SUPPLY CONNECTOR (*)	CEE 16A 9h 230VAC - 3PH + G plug
Y POWER SUPPLY CONNECTOR	CEE 16A 6h 400VAC - 3PH + G plug
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	2
DC BRAKE SIZE	08
DC BRAKE POWER	25 W
DC BRAKE OPERATING VOLTAGE	103 VDC
DC BRAKE RATED TORQUE	8 Nm
DC BRAKE RATED TORQUE REDUCTION AT THE SPEED SPECIFICATION x %	85% (1500 r/min)
DC BRAKE GAP (SL)	0.2 mm
LIMIT SWITCH (*)	2 positions
ENCODER (*)	Incremental or Absolute
SELF-WEIGHT	43 kg

LOW VOLTAGE CONTROL

CONTROL SUPPLY CONNECTOR	CEE 16A 4h 24VAC - 3PH + G black socket
LIMIT SWITCH	2 positions

(*) only on request

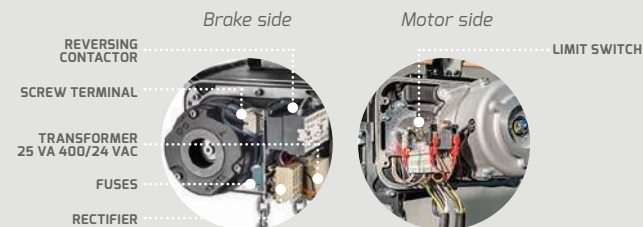

OTHER OPERATING VOLTAGE & FREQUENCY ARE AVAILABLE

EXE
RISE

□ **D8+ 2000kg**
2 REEVES



LARGE FRAME



GENERAL FEATURES

MODEL	EXE Rise chain hoist D8+ 2000kg 2F
TYPE OF CONTROL	Direct or Low Voltage
FEM CLASS	2m
DUTY FACTOR	40%
START PER HOUR	240
BEARING TIME / 10 YEARS	6300h
FALLS OF CHAIN	2
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	8x24 mm
CHAIN SELF-WEIGHT	1.39 kg/m
SAFETY FACTOR	8:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	75 ± 5 cm

The EXE Rise D8+ 2000Kg Large Frame chain hoist double fall is made by gravity casting, durably designed for a heavy duty life cycle. This hoist is everlasting with proper care and maintenance, which makes it ideal for the rugged life on-tour. It's a fantastic option for heavier grid systems often seen in festivals, outdoor venues, arenas and film sets.

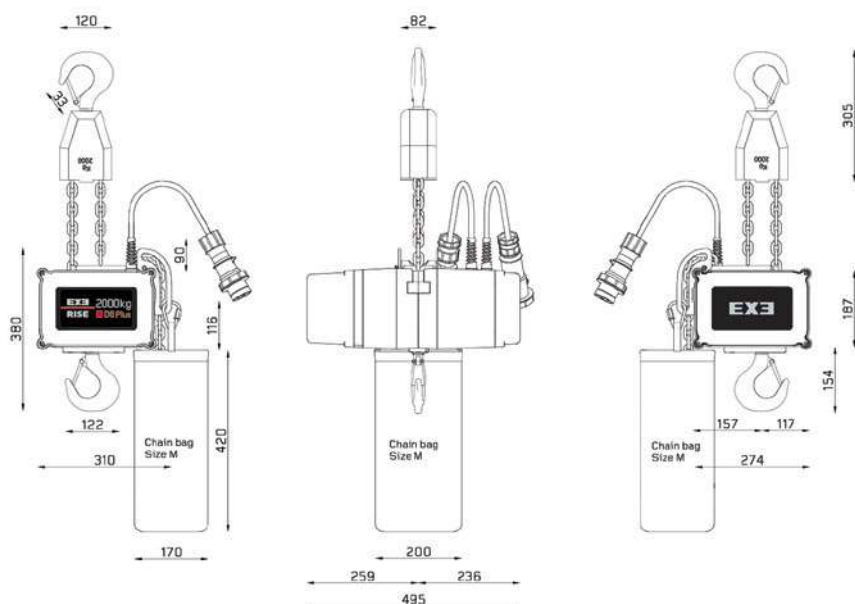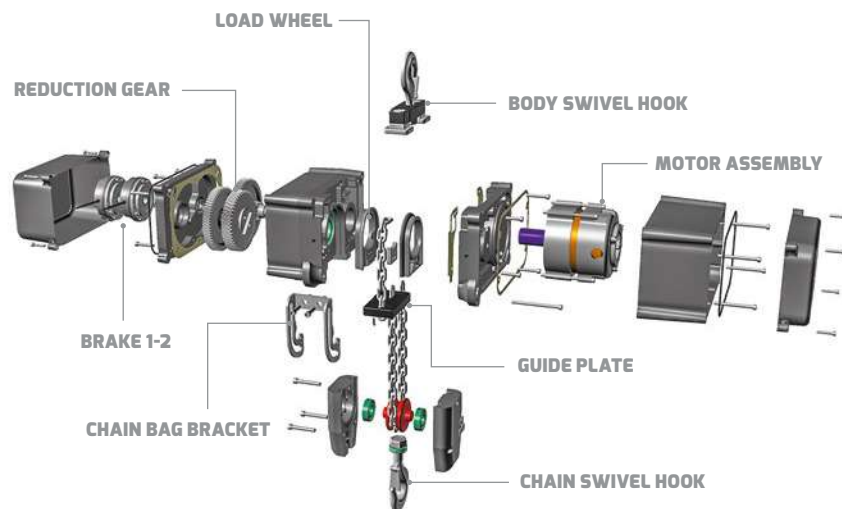

The values are reported in **mm**. DC model has only one cable.

EXE RISE D8+ 2000kg 2F

LARGE FRAME


DIRECT CONTROL

WORKING LOAD LIMIT	2000 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	1.6 kW
OPERATING VOLTAGE Δ/Y	230/400 VAC - 3 - 50 Hz
3PH CURRENT	Δ 8.37 A - Y 4.83 A
Δ POWER SUPPLY CONNECTOR (*)	CEE 16A 9h 230VAC - 3PH + G plug
Y POWER SUPPLY CONNECTOR	CEE 16A 6h 400VAC - 3PH + G plug
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	2
DC BRAKE SIZE	10
DC BRAKE POWER	30 W
DC BRAKE OPERATING VOLTAGE	103 VDC
DC BRAKE RATED TORQUE	16 Nm
DC BRAKE RATED TORQUE REDUCTION AT THE SPEED SPECIFICATION x %	83% (1500 r/min)
DC BRAKE GAP (SL)	0.2 mm
LIMIT SWITCH (*)	2 positions
ENCODER (*)	Incremental or Absolute
SELF-WEIGHT	45 kg

LOW VOLTAGE CONTROL

CONTROL SUPPLY CONNECTOR	CEE 16A 4h 24VAC - 3PH + G black socket
LIMIT SWITCH	2 positions

(*) only on request

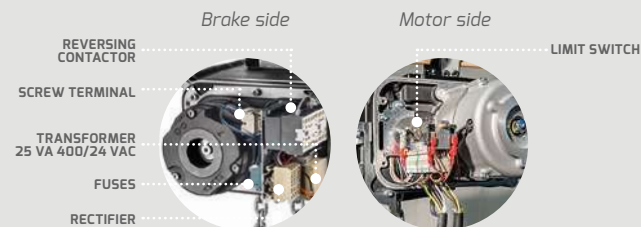

OTHER OPERATING VOLTAGE & FREQUENCY ARE AVAILABLE

EXE
RISE

□ **D8+ 1600kg**
1 REEVE



EXTRA LARGE FRAME COMPACT



GENERAL FEATURES

MODEL	EXE Rise chain hoist D8+ 1600kg
TYPE OF CONTROL	Direct or Low Voltage
FEM CLASS	3m
DUTY FACTOR	50%
START PER HOUR	300
BEARING TIME / 10 YEARS	12500h
FALLS OF CHAIN	1
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	10x28 mm
CHAIN SELF-WEIGHT	2.24 kg/m
SAFETY FACTOR	8:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	75 ± 5 cm

The **EXE Rise D8+ 1600kg Extra Large Frame Compact chain hoist** is the solution when one-ton isn't enough capacity, but you don't want the monstrosity of a bulkier extra large frame. This beauty has been expertly designed to retain an 8-to-1 safety factor in conformance with D8+ requirements while maintaining its figure. Fashionably safer with a single fall chain to avoid the risk of unintentional twist, which is common with double-reeved hoists. There's enough for you to double-triple-quadruple check. This very capable hoist has a FEM class rating of 3m. Use it for large outdoor structures and permanent installations.

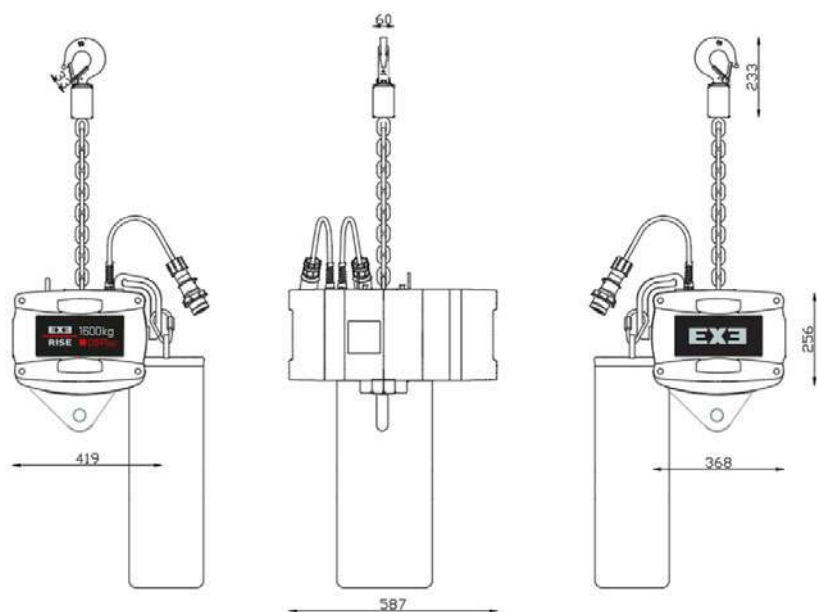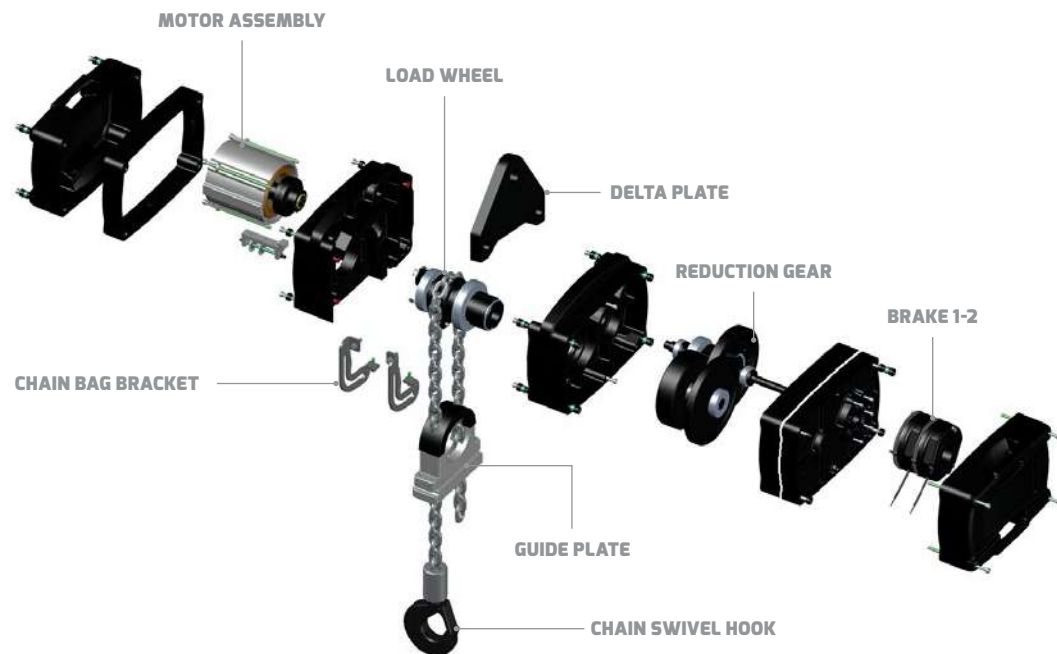

The values are reported in **mm**. DC model has only one cable.

EXE RISE D8+ 1600kg

EXTRA LARGE FRAME COMPACT


DIRECT CONTROL

WORKING LOAD LIMIT	1600 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	2.0 kW
OPERATING VOLTAGE Δ /Y	230/400 VAC - 3 - 50 Hz
3PH CURRENT	Δ 9.9 A - Y 5.7 A
Δ POWER SUPPLY CONNECTOR (*)	CEE 16A 9h 230VAC - 3PH + G plug
Y POWER SUPPLY CONNECTOR	CEE 16A 6h 400VAC - 3PH + G plug
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	2
DC BRAKE SIZE	10
DC BRAKE POWER	30 W
DC BRAKE OPERATING VOLTAGE	103 VDC
DC BRAKE RATED TORQUE	16 Nm
DC BRAKE RATED TORQUE REDUCTION AT THE SPEED SPECIFICATION x %	83% (1500 r/min)
DC BRAKE GAP (SL)	0.2 mm
LIMIT SWITCH	2 positions
ENCODER (*)	Incremental or Absolute
SELF-WEIGHT	110 kg

LOW VOLTAGE CONTROL

CONTROL SUPPLY CONNECTOR	CEE 16A 4h 24VAC - 3PH + G black socket
LIMIT SWITCH	2 positions

(*) only on request

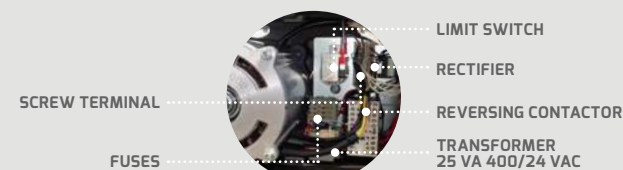

OTHER OPERATING VOLTAGE & FREQUENCY ARE AVAILABLE

EXE
RISE

□ **D8+ 2000kg**
1 REEVE

EXTRA LARGE FRAME



CHAIN HOIST



GENERAL FEATURES

MODEL	EXE Rise chain hoist D8+ 2000kg
TYPE OF CONTROL	Direct or Low Voltage
FEM CLASS	3m
DUTY FACTOR	50%
START PER HOUR	300
BEARING TIME / 10 YEARS	12500h
FALLS OF CHAIN	1
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	11.3x31 mm
CHAIN SELF-WEIGHT	2.85 kg/m
SAFETY FACTOR	8:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	75 ± 5 cm

The **EXE Rise D8+ 2000kg Extra Large Frame chain hoist** single reeve is extremely strong, corrosion resistant and no-reflective as possible due to the body made from cast aluminium with matt black finish. Handling and lifting of the chain hoist is facilitated by handles that work in either operational orientation. The possibility of using the chain hoist in both Standard and Self Climbing positions, combined with its swivel or fixed hook feature, increase practicality and versatility.

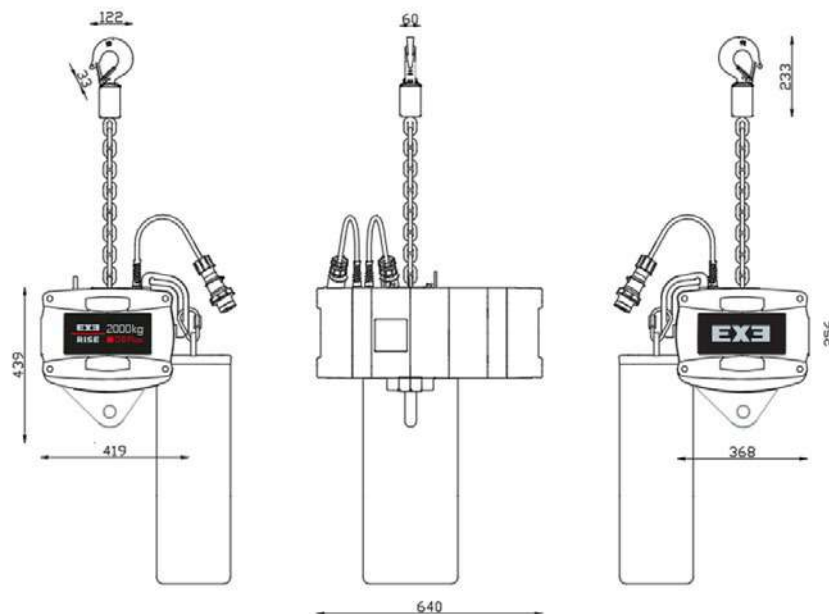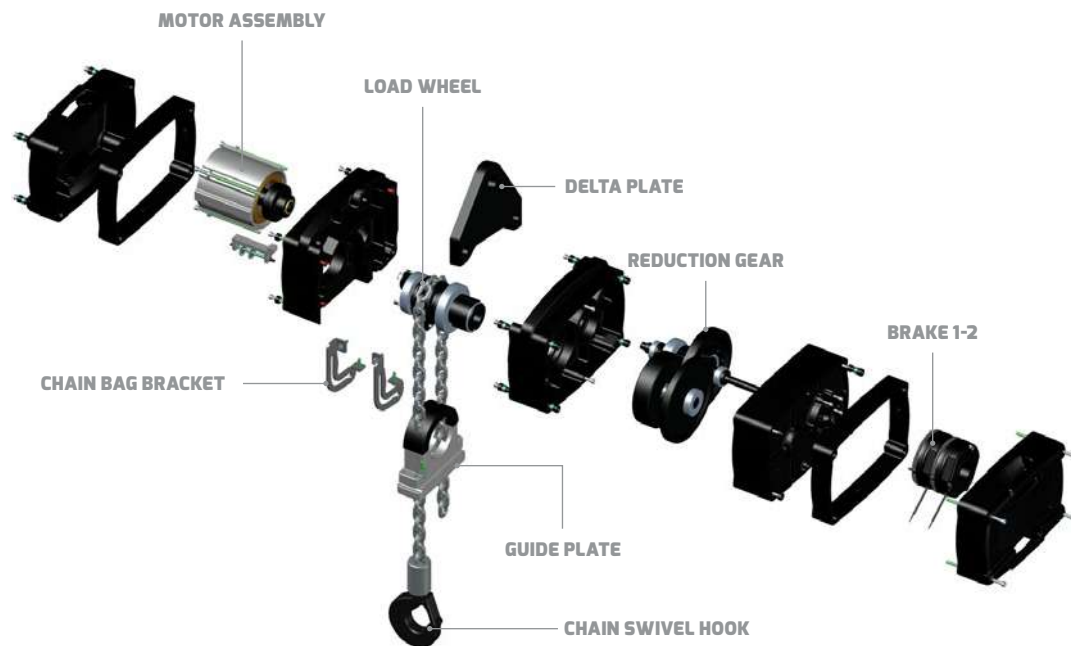

The values are reported in **mm**. DC model has only one cable.

EXE RISE D8+ 2000kg

EXTRA LARGE FRAME

DIRECT CONTROL

WORKING LOAD LIMIT	2000 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	2.0 kW
OPERATING VOLTAGE Δ /Y	230/400 VAC - 3 - 50 Hz
3PH CURRENT	Δ 9.9 A - Y 5.7 A
Δ POWER SUPPLY CONNECTOR (*)	CEE 16A 9h 230VAC - 3PH + G plug
Y POWER SUPPLY CONNECTOR	CEE 16A 6h 400VAC - 3PH + G plug
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	2
DC BRAKE SIZE	12
DC BRAKE POWER	40 W
DC BRAKE OPERATING VOLTAGE	103 VDC
DC BRAKE RATED TORQUE	32 Nm
DC BRAKE RATED TORQUE REDUCTION AT THE SPEED SPECIFICATION x %	81% (1500 r/min)
DC BRAKE GAP (SL)	0.3 mm
LIMIT SWITCH	2 positions
ENCODER (*)	Incremental or Absolute
SELF-WEIGHT	123 kg

LOW VOLTAGE CONTROL

CONTROL SUPPLY CONNECTOR	CEE 16A 4h 24VAC - 3PH + G black socket
LIMIT SWITCH	2 positions

(*) only on request



OTHER OPERATING VOLTAGE & FREQUENCY ARE AVAILABLE

EXE
RISE

□ **D8+ 2500kg**
1 REEVE



EXTRA LARGE FRAME



GENERAL FEATURES

MODEL	EXE Rise chain hoist D8+ 2500kg
TYPE OF CONTROL	Direct or Low Voltage
FEM CLASS	3m
DUTY FACTOR	50%
START PER HOUR	300
BEARING TIME / 10 YEARS	12500h
FALLS OF CHAIN	1
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	13x36 mm
CHAIN SELF-WEIGHT	3.80 kg/m
SAFETY FACTOR	8:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	75 ± 5 cm

The **EXE Rise D8+ 2500kg Extra Large Frame chain hoist** have a FEM class rating of 3m and it's single reeved, maintaining an 8-to-1 safety factor. These hoists are ideal for some of the heaviest rigs such as line arrays, LED walls, scoreboards, complex mothergrids, and epic EDM festivals. If needed, these hoists can be manufactured with a double-reeved chain to double the load capacity for roof systems.

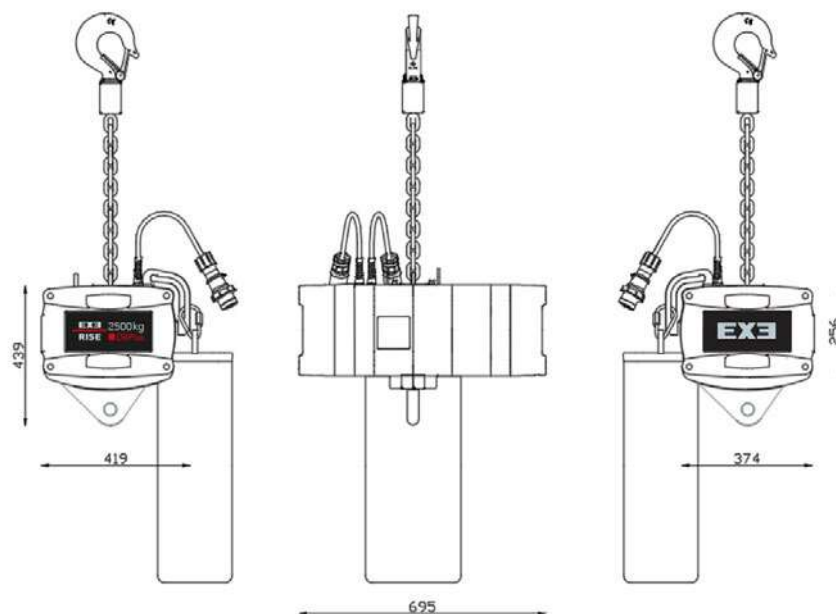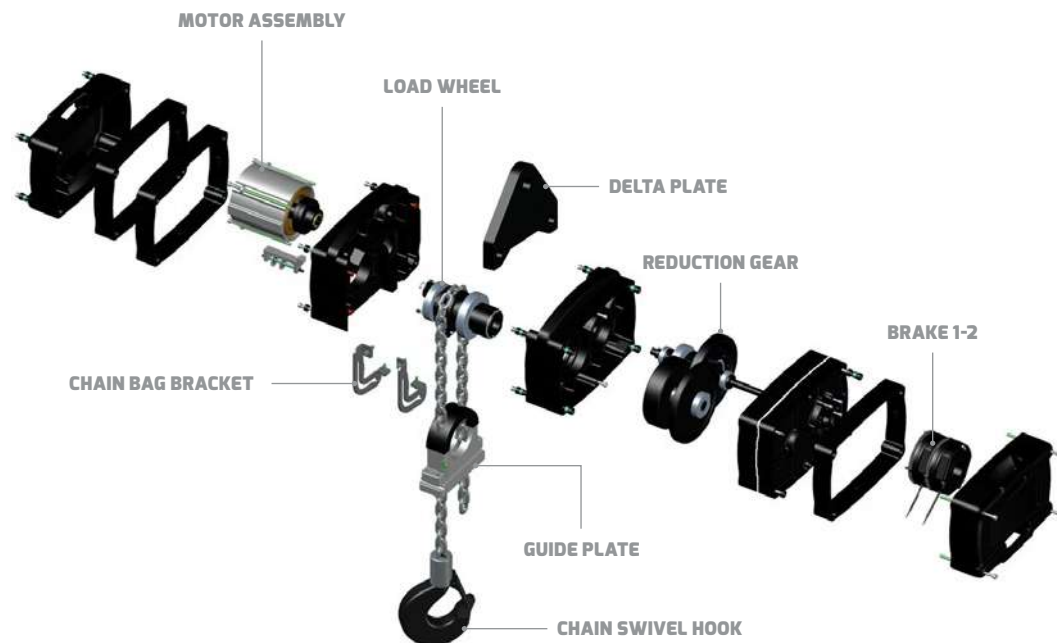

EXE RISE D8+ 2500kg

EXTRA LARGE FRAME


DIRECT CONTROL

WORKING LOAD LIMIT	2500 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	2.5 kW
OPERATING VOLTAGE Δ /Y	230/400 VAC - 3 - 50 Hz
3PH CURRENT	Δ 12 A - Y 7 A
Δ POWER SUPPLY CONNECTOR (*)	CEE 16A 9h 230VAC - 3PH + G plug
Y POWER SUPPLY CONNECTOR	CEE 16A 6h 400VAC - 3PH + G plug
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	2
DC BRAKE SIZE	12
DC BRAKE POWER	40 W
DC BRAKE OPERATING VOLTAGE	103 VDC
DC BRAKE RATED TORQUE	32 Nm
DC BRAKE RATED TORQUE REDUCTION AT THE SPEED SPECIFICATION x %	81% (1500 r/min)
DC BRAKE GAP (SL)	0.3 mm
LIMIT SWITCH	2 positions
ENCODER (*)	Incremental or Absolute
SELF-WEIGHT	125 kg

LOW VOLTAGE CONTROL

CONTROL SUPPLY CONNECTOR	CEE 16A 4h 24VAC - 3PH + G black socket
LIMIT SWITCH	2 positions

(*) only on request

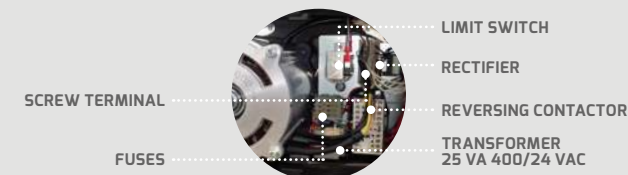

OTHER OPERATING VOLTAGE & FREQUENCY ARE AVAILABLE

EX3 RISE

□ **D8+ 250kg**
SINGLE PHASE

MEDIUM FRAME



230VAC

GENERAL FEATURES


MODEL	EXE Rise D8+ 250kg SINGLE PHASE
FEM CLASS	2m
DUTY FACTOR	40%
START PER HOUR	240
BEARING TIME / 10 YEARS	6300h
FALLS OF CHAIN	1
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	6x18 mm
CHAIN SELF-WEIGHT	0.78 kg/m
SAFETY FACTOR	8:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load

EXE RISE D8+ 250kg MEDIUM FRAME SINGLE PHASE

SINGLE PHASE

WORKING LOAD LIMIT	250 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	0.8 kW
OPERATING VOLTAGE Δ	Δ 230 VAC - 1 - 50 Hz
1PH CURRENT	Δ 3.1 A
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	2
DC BRAKE SIZE	06
DC BRAKE POWER	20 W
DC BRAKE OPERATING VOLTAGE	103 VDC
DC BRAKE RATED TORQUE	4 Nm
DC BRAKE RATED TORQUE REDUCTION AT THE SPEED SPECIFICATION x %	87% (1500 r/min)
DC BRAKE GAP (SL)	0.2 mm
SELF-WEIGHT	24 kg

The values are reported in mm.

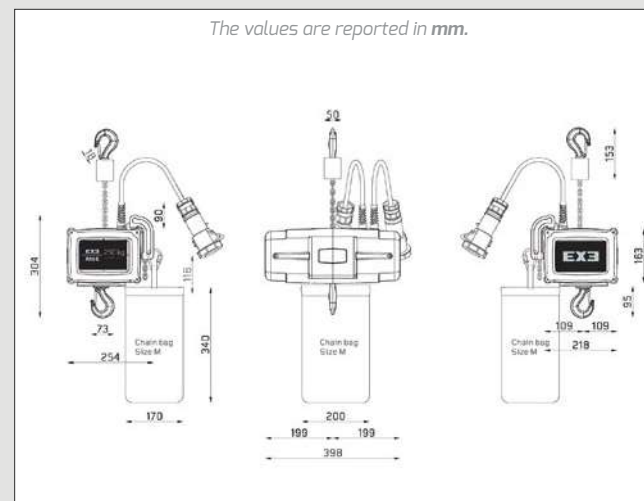

The **EXE Rise D8+ 250kg SINGLE PHASE** chain hoist designed around our medium size body, with a WLL of 250 kg. Ideal for many locations where 3 phase power might not be available.

EX3 RISE

□ **D8+ 500kg**
SINGLE PHASE

MEDIUM FRAME

EXE RISE D8+ 500kg MEDIUM FRAME WITH INVERTER SINGLE PHASE

SINGLE PHASE

WORKING LOAD LIMIT	500 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	0.8 kW
OPERATING VOLTAGE Δ	Δ 230 VAC - 1 - 50 Hz
1PH CURRENT	Δ 6.0 A
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	2
DC BRAKE SIZE	06
DC BRAKE POWER	20 W
DC BRAKE OPERATING VOLTAGE	103 VDC
DC BRAKE RATED TORQUE	4 Nm
DC BRAKE RATED TORQUE REDUCTION AT THE SPEED SPECIFICATION x %	87% (1500 r/min)
DC BRAKE GAP (SL)	0.2 mm
SELF-WEIGHT	27 kg




230VAC

GENERAL FEATURES

MODEL	D8+ 500kg SINGLE PHASE
FEM CLASS	2m
DUTY FACTOR	40%
START PER HOUR	240
BEARING TIME / 10 YEARS	6300h
FALLS OF CHAIN	1
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	6x18 mm
CHAIN SELF-WEIGHT	0.78 kg/m
SAFETY FACTOR	8:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load

The **EXE Rise D8+ 500kg SINGLE PHASE** chain hoist designed around our medium size body, with inverter. WLL of 500 kg. Ideal for many locations where 3 phase power might not be available.

The values are reported in mm.

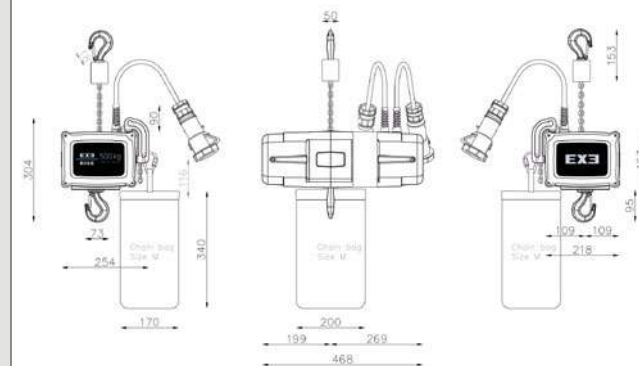







02

EXE
ACE

EXE ACE D8

A NEW ERA OF CHAIN HOISTS PUT AN ACE IN YOUR HANDS

EXE Ace collection is for you if you're looking for a cost effective solution for one-off events or for installations that last weeks or months at a time.

Since these types of events don't require constant starts and stops day after day after day from the hoist, the **EXE Ace** collection has been designed for a lower duty cycle.

While **EXE Ace** hoists are all compliant with D8 requirements, we have been able to make them more lightweight by designing them to a standard 5-to-1 safety factor with a single brake unit, though a secondary brake is available as an add-on when ordering new **EXE Ace** hoists.

It's possible configure new **EXE Ace** hoists to comply with your country's mains power supply and can provide either direct or low voltage control.

These hoists pair very well with the **EXE Drive** 4 or 8 channel Basic Controllers.

Overview

EXE ACE D8 FIXED SPEED CHAIN HOISTS

MEDIUM FRAME ULTRA COMPACT

MEDIUM FRAME COMPACT

MEDIUM FRAME

EXTRA LARGE FRAME COMPACT

250kg

500kg

1000kg

2000kg



DIRECT CONTROL

LOW VOLTAGE CONTROL

CHAIN HOIST

EX3
ACE
▲ D8 250kg
MEDIUM FRAME ULTRA COMPACT



GENERAL FEATURES

MODEL	EXE Ace chain hoist D8 250kg DC
TYPE OF CONTROL	Direct Voltage
FEM CLASS	2m
DUTY FACTOR	25%
START PER HOUR	150
BEARING TIME / 10 YEARS	1600 h
FALLS OF CHAIN	1
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	5x15 mm
CHAIN SELF-WEIGHT	0.54 kg/m
SAFETY FACTOR	8:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	75 ± 5 cm

The **EXE Ace D8 250kg Medium Frame Ultra Compact chain hoist** is made from extremely light cast aluminum. Its low profile frame makes it ideal for squeezing into small spaces and achieving the greatest possible headroom in low-ceiling venues. This lightweight, compact hoist is ideal for wedding receptions, corporate event venues, and for simple rigs in educational, religious or theatrical settings.

EXE ACE D8 250kg

MEDIUM FRAME ULTRA COMPACT

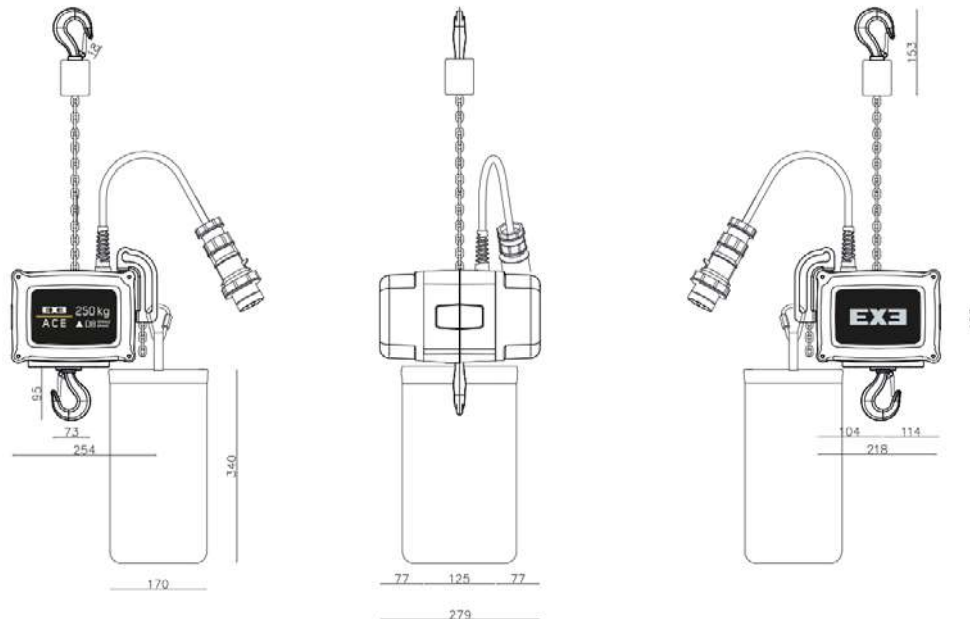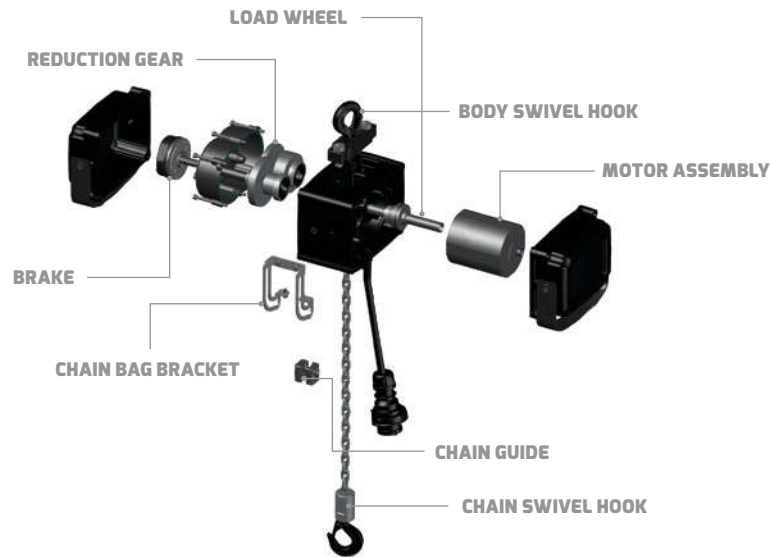

The values are reported in **mm**.

DIRECT CONTROL	
WORKING LOAD LIMIT	250 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	0.36 kW
OPERATING VOLTAGE Δ /Y	230/400 VAC - 3 - 50 Hz
3PH CURRENT	Δ 1.84 A - Y 1.06 A
Δ POWER SUPPLY CONNECTOR (*)	CEE 16A 9h 230VAC - 3PH + G plug
Y POWER SUPPLY CONNECTOR	CEE 16A 6h 400VAC - 3PH + G plug
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	1
DC BRAKE SIZE	06
DC BRAKE POWER	20 W
DC BRAKE OPERATING VOLTAGE	103 VDC
DC BRAKE RATED TORQUE	4 Nm
DC BRAKE GAP (SL)	0.2 mm
SELF-WEIGHT	19.5 kg

D8 198KG MODEL ALSO AVAILABLE





FOR OTHER OPERATING VOLTAGE & FREQUENCY CONTACT EXE OFFICE

EXE
ACE
▲ D8 500kg
MEDIUM FRAME COMPACT

GENERAL FEATURES

MODEL	EXE Ace chain hoist D8 500kg DC / LVC
TYPE OF CONTROL	Direct Voltage or Low Voltage
FEM CLASS	1Bm
DUTY FACTOR	25%
START PER HOUR	150
BEARING TIME / 10 YEARS	1600 h
FALLS OF CHAIN	1
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	5x15 mm
CHAIN SELF-WEIGHT	0.54 kg/m
SAFETY FACTOR	5:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	75 ± 5 cm

The **EXE Ace D8 500kg Medium Frame Compact chain hoist** is extremely light due to its small body made from cast aluminium. Handling and lifting of the chain hoist is facilitated by handles that work in either operational orientation. The possibility of using the chain hoist in both Standard and Self Climbing positions, combined with its swivel or fixed hook feature, increase practicality and versatility.

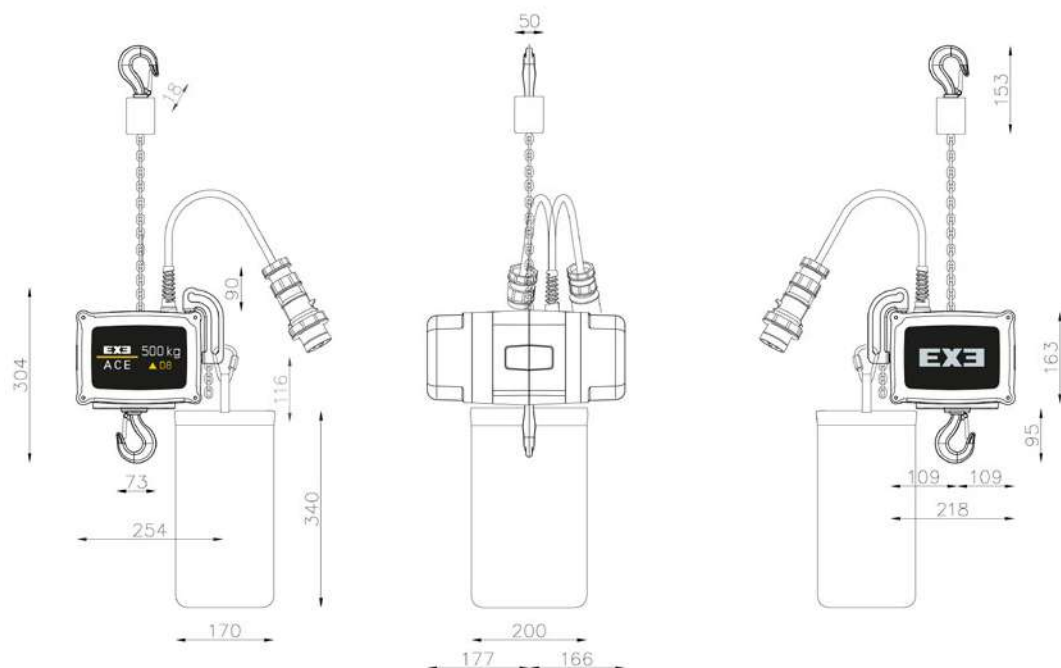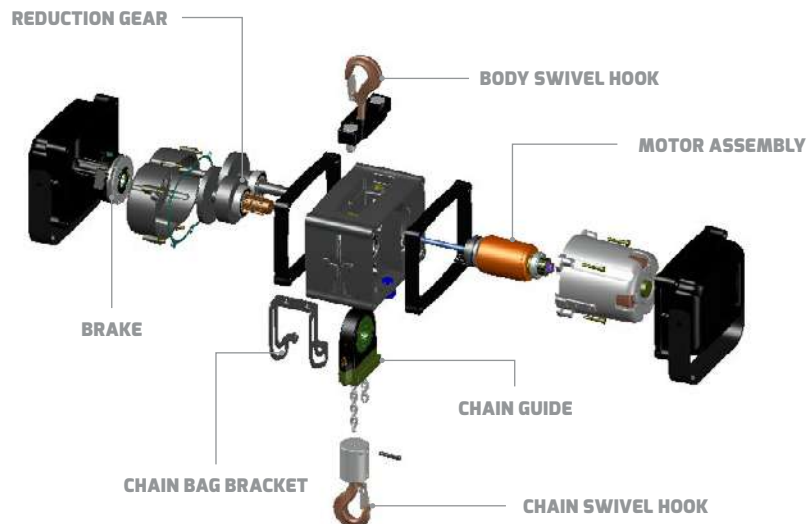

The values are reported in **mm**. DC model has one cable and brake side ring absent

EXE ACE D8 500kg

MEDIUM FRAME COMPACT


DIRECT CONTROL

WORKING LOAD LIMIT	500 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	0.5 kW
OPERATING VOLTAGE Δ /Y	230/400 VAC - 3 - 50 Hz
3PH CURRENT	Δ 2.70 A - Y 1.56 A
Δ POWER SUPPLY CONNECTOR (*)	CEE 16A 9h 230VAC - 3PH + G plug
Y POWER SUPPLY CONNECTOR	CEE 16A 6h 400VAC - 3PH + G plug
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	1
DC BRAKE SIZE	06
DC BRAKE POWER	20 W
DC BRAKE OPERATING VOLTAGE	104 VDC
DC BRAKE RATED TORQUE	4 Nm
DC BRAKE GAP (SL)	0.2 mm
LIMIT SWITCH*	2 Position
ENCODER*	On request
SELF-WEIGHT	21.5 kg

LOW VOLTAGE CONTROL

CONTROL SUPPLY CONNECTOR	CEE 16A 9h 230VAC - 3PH + G black socket
--------------------------	--

(*) only on request

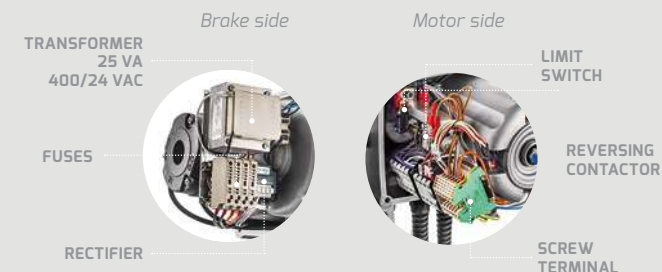

FOR OTHER OPERATING VOLTAGE & FREQUENCY CONTACT EXE OFFICE

EXE
ACE
▲ D8 1000kg
MEDIUM FRAME




GENERAL FEATURES

MODEL	EXE Ace chain hoist D8 1000kg DC / LVC
TYPE OF CONTROL	Direct Voltage or Low Voltage
FEM CLASS	1Bm
DUTY FACTOR	25%
START PER HOUR	150
BEARING TIME / 10 YEARS	1600 h
FALLS OF CHAIN	1
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	6.3x19 mm
CHAIN SELF-WEIGHT	0.86 kg/m
SAFETY FACTOR	5:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	75 ± 5 cm

The **EXE Ace D8 1000kg Medium Frame chain hoist** is extremely compact and corrosion resistant due to the innovative body carefully designed to reduce size and weight. Handling and lifting of the chain hoist is facilitated by handles that work in either operational orientation. The possibility of using the chain hoist in both Standard and Self Climbing positions, combined with its swivel or fixed hook feature, increase practicality and versatility. The clutch is located on the motor shaft, in front of the motor assembly, which positions it outside of the load path.

EXE ACE D8 1000kg

MEDIUM FRAME

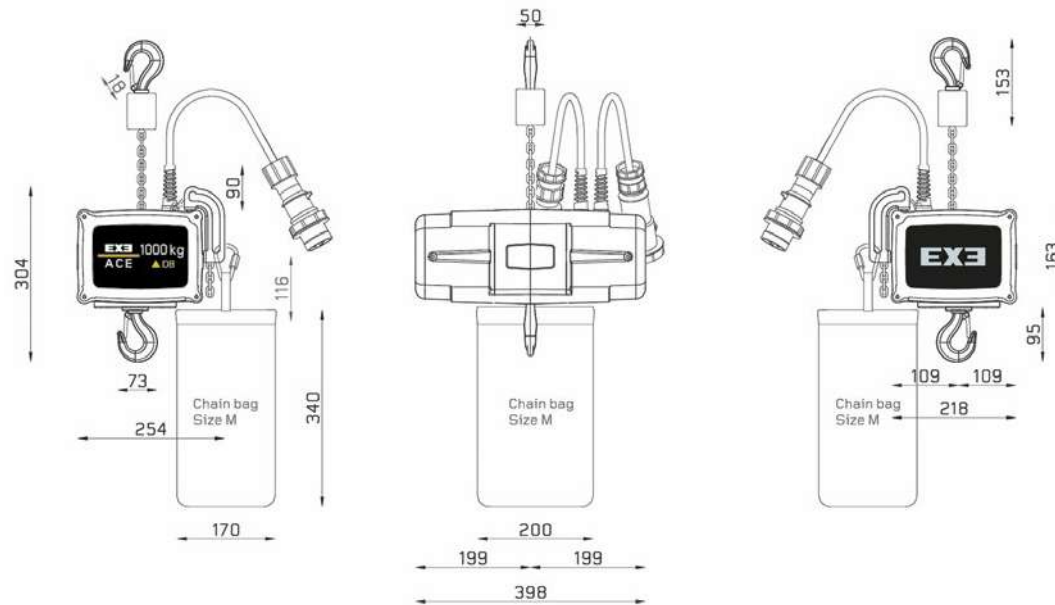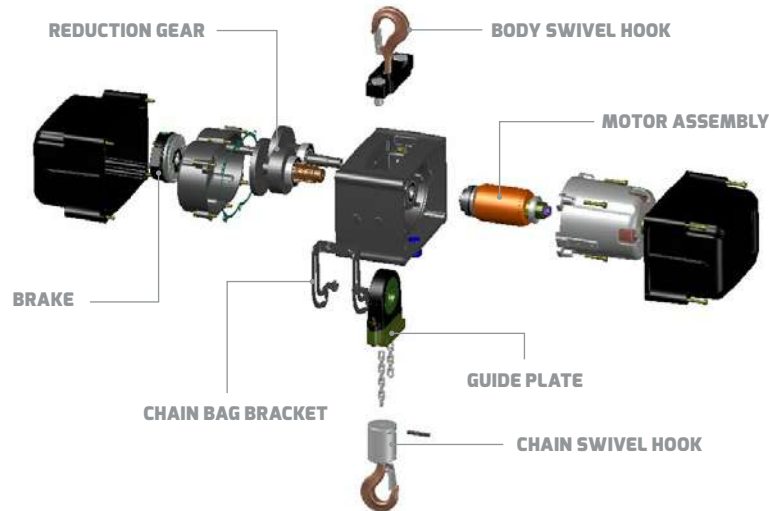

The values are reported in **mm**. DC model has one cable


DIRECT CONTROL

WORKING LOAD LIMIT	1000 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	1.0 kW
OPERATING VOLTAGE Δ /Y	230/400 VAC - 3 - 50 Hz
3PH CURRENT	Δ 4.62 A - Y 2.67 A
Δ POWER SUPPLY CONNECTOR (*)	CEE 16A 9h 230VAC - 3PH + G plug
Y POWER SUPPLY CONNECTOR	CEE 16A 6h 400VAC - 3PH + G plug
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	1
DC BRAKE SIZE	08
DC BRAKE POWER	25 W
DC BRAKE OPERATING VOLTAGE	104 VDC
DC BRAKE RATED TORQUE	8 Nm
DC BRAKE GAP (SL)	0.2 mm
LIMIT SWITCH*	2 Position
ENCODER*	On request
SELF-WEIGHT	24 kg

LOW VOLTAGE CONTROL

CONTROL SUPPLY CONNECTOR	CEE 16A 4h 24VAC - 3PH + G black socket
--------------------------	---

(*) only on request

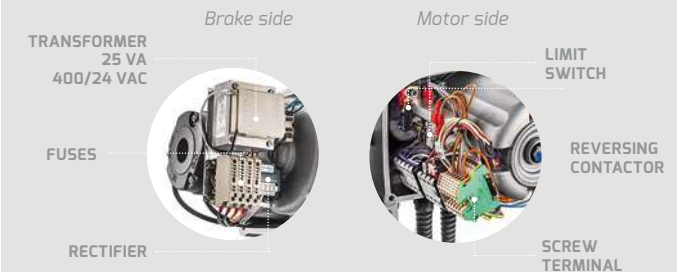



FOR OTHER OPERATING VOLTAGE & FREQUENCY CONTACT EXE OFFICE

EXE
ACE
▲ D8 2000kg
EXTRA LARGE FRAME COMPACT


GENERAL FEATURES

MODEL	EXE Ace chain hoist D8 2000kg DC / LVC
TYPE OF CONTROL	Direct Voltage or Low Voltage
FEM CLASS	1Bm
DUTY FACTOR	25%
START PER HOUR	150
BEARING TIME / 10 YEARS	1600 h
FALLS OF CHAIN	1
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	10x28 mm
CHAIN SELF-WEIGHT	2.24 kg/m
SAFETY FACTOR	5:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	75 ± 5 cm

The **EXE Ace D8 2000kg Extra Large Frame Compact chain hoist** is extremely compact and corrosion resistant due to the innovative body carefully designed to reduce size and weight. Handling and lifting of the chain hoist is facilitated by handles that work in either operational orientation. The possibility of using the chain hoist in both Standard and Self Climbing positions, combined with its swivel or fixed hook feature, increase practicality and versatility. The clutch is located on the motor shaft, in front of the motor assembly, which positions it outside of the load path.

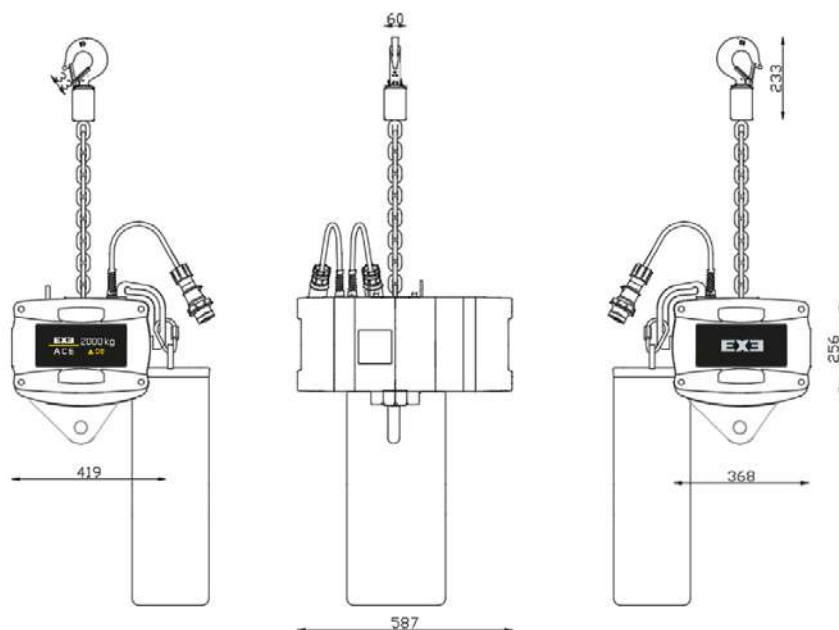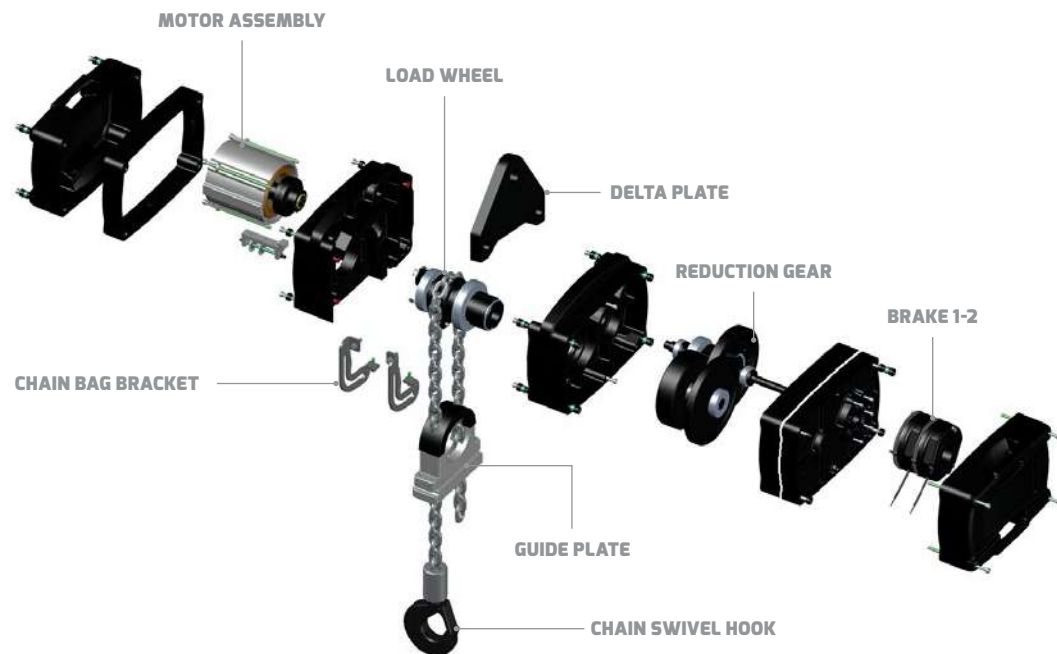

The values are reported in **mm**. DC model has one cable

EXE ACE D8 2000kg

EXTRA LARGE FRAME COMPACT


DIRECT CONTROL

WORKING LOAD LIMIT	2000 kg
FREQUENCY	50 Hz
LIFTING SPEED	4m/min $\pm$ 1%
MOTOR POWER	2.0 kW
OPERATING VOLTAGE Δ /Y	230/400 VAC - 3 - 50 Hz
3PH CURRENT	Δ 9.9 A - Y 5.7 A
Δ POWER SUPPLY CONNECTOR (*)	CEE 16A 9h 230VAC - 3PH + G plug
Y POWER SUPPLY CONNECTOR	CEE 16A 6h 400VAC - 3PH + G plug
REVOLUTIONS PER MINUTE	1400
NUMBER OF BRAKES	2
DC BRAKE SIZE	10
DC BRAKE POWER	30 W
DC BRAKE OPERATING VOLTAGE	104 VDC
DC BRAKE RATED TORQUE	16 Nm
DC BRAKE GAP (SL)	0.25 mm
LIMIT SWITCH*	2 Position
ENCODER*	On request
SELF-WEIGHT	110 kg

LOW VOLTAGE CONTROL

CONTROL SUPPLY CONNECTOR	CEE 16A 4h 24VAC - 3PH + G black socket
--------------------------	---

(*) only on request

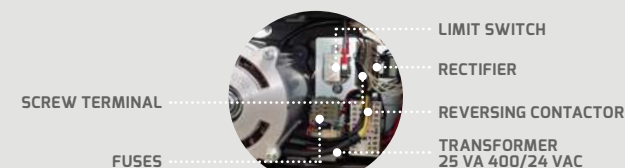

FOR OTHER OPERATING VOLTAGE & FREQUENCY CONTACT EXE OFFICE





EXE 500kg
ACE ▲D8

EXE
DRIVE

EXE

EXE VARIO

VARIABLE SPEED CHAIN HOISTS

Suitable for body-up and body-down (self-climbing or standard suspension), without the need for any adjustments modifications.

The EXE Vario is based around the existing large frame EXE Rise and has been converted for use with the popular Kinesys Elevation 1+ controller. Development was carried out in close collaboration with the team at Kinesys Projects Ltd.

All variable speed chain hoists are supplied ready for use. Every hoist is fitted with double brakes, four position limit switches and encoders as standard. The available models has a lifting capacity of 500kg and 1000kg with a 8x24 mm chain. The EXE Vario has the ability to ramp start, ramp stop, program preset positions and vary the speed of the chain hoist for maximum creative effect.

When it comes to control, the EXE Vario chain hoist is compatible with Kinesys Vector and K2 control platforms, which are “tour-proven” and universally recognised as the industry standard.


The EXE Vario chain hoist can also be used as a fixed speed hoist by adding an adapter cable, which allows connection to a standard controller. It can also be provided without Kinesys conversion for custom wiring installations.

Overview

EXE VARIO D8+ 500kg	EXE VARIO D8+ 1000kg
MAX LIFTING SPEED: 20m/min @50Hz 24m/min @60Hz	MAX LIFTING SPEED: 10m/min @50Hz 12m/min @60Hz
	

VARIABLE SPEED CHAIN HOIST CONFIGURATION

Wiring diagram for a generic EXE Vario hoist configuration

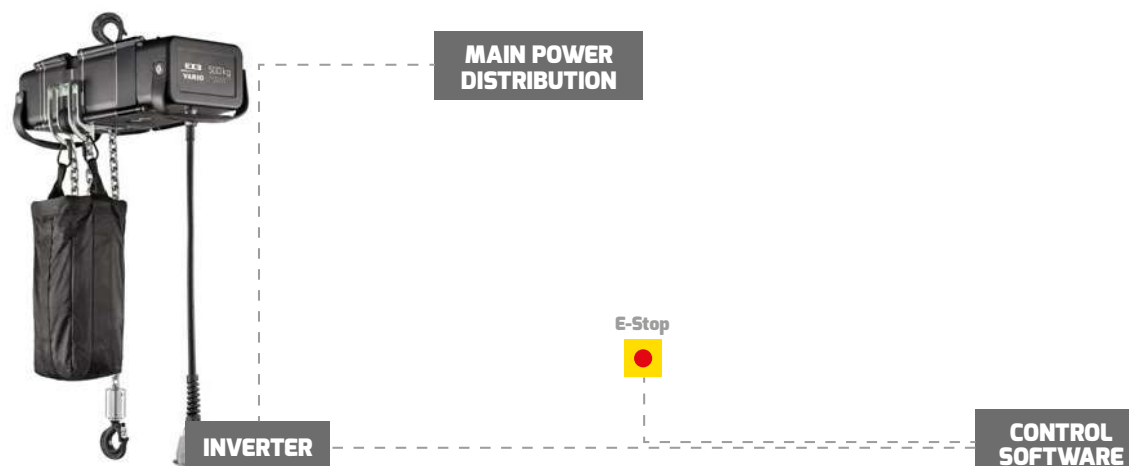

EX3 VARIO

□ D8+ 500kg

VARIABLE SPEED



GENERAL FEATURES	
MODEL	D8+ 500kg VARIABLE SPEED
FEM CLASS	18m
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	8x24 mm
CHAIN SELF-WEIGHT	1.39 kg/m
SAFETY FACTOR	8:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	165 ± 5 cm

EXE Vario Chain Hoist D8+ 500kg


EXE Vario is a variable speed chain hoist converted for use with the Kinesys Control System

EXE VARIO D8+ 500kg

VARIABLE SPEED

WORKING LOAD LIMIT	500 kg
FREQUENCY - MAX LIFTING SPEED	50 Hz: max 20 m/min 60 Hz: max 24 m/min
MOTOR POWER	2.2 kW
OPERATING VOLTAGE	Y 400 VAC - 3 - 50 Hz
3PH CURRENT	Y 5.5 A
REVOLUTIONS PER MINUTE	2800
NUMBER OF BRAKES	2
DC BRAKE SIZE	10
DC BRAKE POWER	30 W
DC BRAKE OPERATING VOLTAGE	205 VDC
DC BRAKE RATED TORQUE	16 Nm
DC BRAKE RATED TORQUE REDUCTION AT THE SPEED SPECIFICATION x %	76% (3000 r/min)
DC BRAKE GAP (SL)	0.2 mm
SELF-WEIGHT	50 kg

The values are reported in mm.

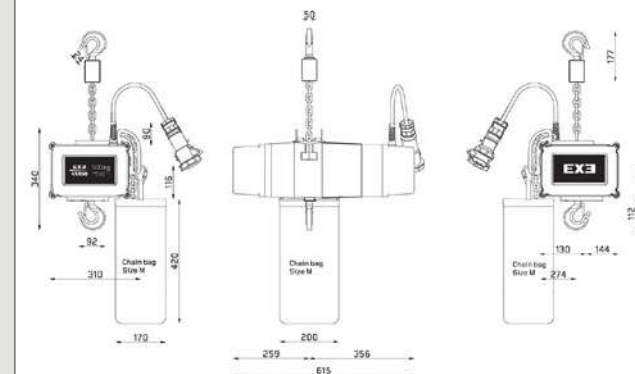

EX3 VARIO

□ D8+ 1000kg

VARIABLE SPEED



GENERAL FEATURES	
MODEL	D8+ 1000kg VARIABLE SPEED
FEM CLASS	18m
TYPE OF CHAIN	DIN EN 818-7 - type DAT steel 80 grade Zinc galvanized or phosphated
SIZE OF CHAIN	8x24 mm
CHAIN SELF-WEIGHT	1.39 kg/m
SAFETY FACTOR	8:1
IP RATE	55
INSULATION CLASS (TEMPERATURE CLASS)	F according to CEI 15-26
LOAD WHEEL	5 pockets
NOISE LEVEL	67.5 dB @ full load
CONNECTION CABLE LENGHT	165 ± 5 cm


EXE Vario Chain Hoist D8+ 1000kg

EXE Vario is a variable speed chain hoist converted for use with the Kinesys Control System

EXE VARIO D8+ 1000kg

VARIABLE SPEED

WORKING LOAD LIMIT	1000 kg
FREQUENCY - MAX LIFTING SPEED	50 Hz: max 10 m/min 60 Hz: max 12 m/min
MOTOR POWER	2.2 kW
OPERATING VOLTAGE	Y 400 VAC - 3 - 50 Hz
3PH CURRENT	Y 5.5 A
REVOLUTIONS PER MINUTE	2800
NUMBER OF BRAKES	2
DC BRAKE SIZE	10
DC BRAKE POWER	30 W
DC BRAKE OPERATING VOLTAGE	205 VDC
DC BRAKE RATED TORQUE	16 Nm
DC BRAKE RATED TORQUE REDUCTION AT THE SPEED SPECIFICATION x %	76% (3000 r/min)
DC BRAKE GAP (SL)	0.2 mm
SELF-WEIGHT	52 kg

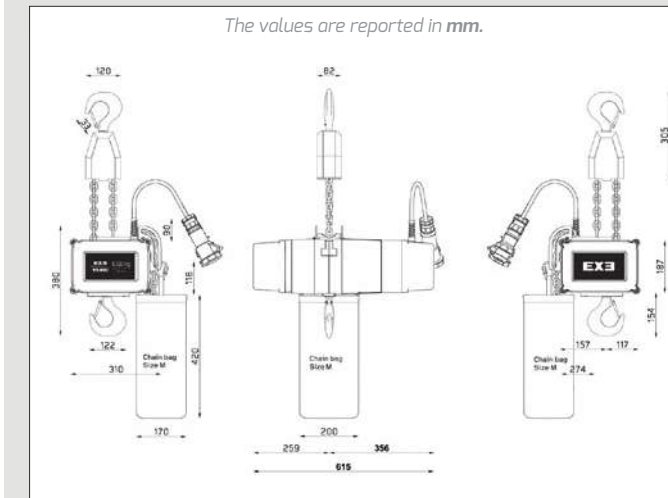

THE COMPLETE LIST OF OF EXE TECHNOLOGY ACCESSORIES

Discover the range of accessories compatible with your EXE chain hoists and the new EXE Technology Safety Helmet: in this section you will find all the accessories and upgrades for your products.



SAFETY HELMET FOR INDUSTRIAL USE

KEY FEATURES

CERTIFICATION:	EN 397
CODE	GRAY: LT SHARMG-E01P BLACK: LT SHARMK-E01P
SIZE:	53-63 cm adjustable
WEIGHT:	430g
MATERIAL:	PP - polypropylene

FRONT VIEW



BACK VIEW



FRONT VIEW



BACK VIEW



FLIGHT CASE



Flight cases are extremely robust with protection against bumps and vibration. Parts are assembled using aluminum bordering, handles, closures and casing, with fixed wheels and trans pallet supports. Flight cases are fireproof and waterproof.

SIZE	1X M	2X M	L
A4l Code	XRFMFC1N	XRFMFC2N	XRFLF1N
Dimensions B1xB2xH (cm)	74x57x58 cm	74x57x58 cm	74x57x58 cm
Dimensions B1xB2xH (inch)	29.1x22.4x22.8 inch	29.1x22.4x22.8 inch	29.1x22.4x22.8 inch
Quantity of Hoist	1	2	1
Exe Rise Hoists Compatibility	MEDIUM FRAME ULTRA MEDIUM FRAME COMPACT MEDIUM FRAME	MEDIUM FRAME ULTRA MEDIUM FRAME COMPACT MEDIUM FRAME	LARGE FRAME

1x M



XRFMFC1N

2x M



XRFMFC2N



XRFLF1N

FLIGHT CASE



Flight cases are extremely robust with protection against bumps and vibration. Parts are assembled using aluminum bordering, handles, closures and casing, with fixed wheels and trans pallet supports. Flight cases are fireproof and waterproof.


SIZE	XLA	XLB	XLC
A4l Code	XRFXF1NA	XRFXF1NB	XRFXF1NC
Dimensions B1xB2xH (cm)	85x65x82 cm	113x80x73 cm	80x80x73 cm
Dimensions B1xB2xH (inch)	35.5x25.6x32.3 inch	44.5x31.5x28.7 inch	31.5x31.5x28.7 inch
Quantity of Hoist	1	1	1
Exe Rise Hoists Compatibility	EXTRA LARGE FRAME	EXTRA LARGE FRAME	EXTRA LARGE FRAME



XRFXF1NB



XRFXF1NC

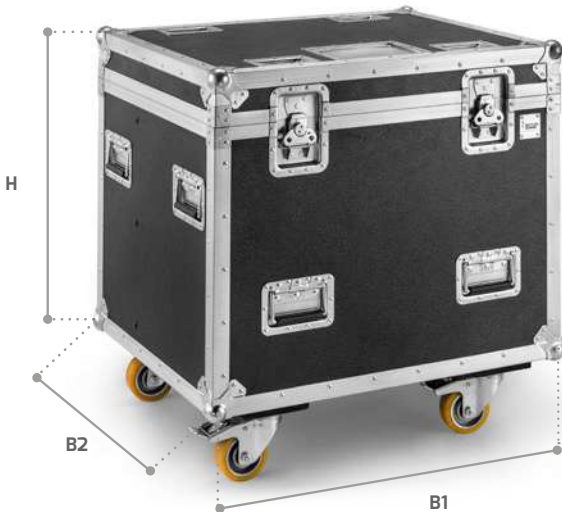

XRFXF1NA

EXE
RISE

EXE
ACE

EXE
VARIO

ACCESSORIES

CHAIN BAG



Chain Bag used for EXE Rise is in Polyvinyl chloride coated polyamide 65% PVC (Nylon 840), 35% Polyamide. There are many sizes from S up to XXXL, depending on the size and leght of the chain

Size	S-	S	M	L
A4I Code	CBH059	CHB024	CHB025	CHB026
External Dimensions [cm] = AxB	20x17	20x17	20x17	20x17
Height [cm] = C	17	34	42	58
Self-Weight [kg]	≈ 1.00	≈ 1.00	≈ 1.00	≈ 1.00
Size	L+	XL	XXL	XXXL
A4I Code	CHB051	CHB028	CHB056	CHB056
External Dimensions [cm] = AxB	27x21	27x21	20x25/20x40	20x20/20x40
Height [cm] = C	55	65	80	115
Self-Weight [kg]	≈ 0.75	≈ 1.00	≈ 1.50	≈ 10

Capacity @ 75%

Ø	S-	S	M	L	L+	XL	XXL	XXXL
5-6 mm	12m	25m	45m	65m	X	X	X	X
7-8 mm	X	12m	25m	40m	55m	70m	X	X
10 - 11.3 mm	X	X	X	X	20m	30m	50m	80m
13 mm	X	X	X	X	X	X	40m	55m

RAIN COVER



STANDARD (UP) POSITION:

Protection from solids and liquids element for EXE Rise chain hoist in OFF mode during seasonal and permanent installations. EXE Technology cover can be used in the motor-up position and fit easily over the top of the motor to form a impermeable barrier.

Size	S	M	L
A4I Code	CHHSBK	CHHMBK	CHHLBK
Commercial Name	Black Cover Small	Black Cover Medium	Black Cover Large
Chain Hoist Compatible	SMALL FRAME	MEDIUM FRAME MEDIUM FRAME COMPACT	LARGE FRAME 1 FALL



CLIMBING (DOWN) POSITION:

Protection from solids and liquids element for EXE Rise chain hoist in OFF mode during seasonal and permanent installations. EXE Technology cover can be used in the motor-down position and fit easily over the top of the motor to form an impermeable barrier.

Size	M	L	L	XL
A4I Code	CHHRCM	CHHRCL	CHHRCLD	CHHRCX
Commercial Name	Black Rain Cover Medium	Black Rain Cover Large	Black Rain Cover Large	Black Rain Cover Extra Large
Chain Hoist Compatible	MEDIUM FRAME	LARGE FRAME 1 FALL	LARGE FRAME 2 FALL	EXTRA LARGE FRAME 1 FALL

EXE
RISE

EXE
ACE

EXE
VARIO

ACCESSORIES

CHAIN



Universal Double Reeve Pulley

Universal Double Reeve Pulley Medium and Large.
It allows to double the load capacity while halving the speed.

NAME	CODE	WLL	TO BE USED WITH CHAIN SIZE:
Universal Double Reeve Pulley Medium	LT XRC-IW01	max 1000kg	5x15 mm 6x18 mm 6.3x19 mm
Universal Double Reeve Pulley Large	LT XRC-IW02	max 2000kg	7x22 mm 7.1x20.5 mm 8x24 mm



Chain Testing Gauge

As the owner of a hoist, you are required to continuously monitor the wear and tear on your hoist chain in accordance with DIN 685 T5 or ISO 7592. A chain may have reached its service life end due to wear of its single or multiple link pitch attachments; wear of the wire diameter, and/or plastic deformation of its chain links due to overloading.

EXE limit gauge consists of an aluminium strip with guide holes for the measuring pins as well as locking holes for the locking studs attached to the measuring pin.

The two galvanised measuring pins provided with locking studs are located, together with the limit gauge, in a high quality softshell bag.

SLIDER

Chain Slider

Dual 9mm cable attachment points. Can be fitted on a load-bearing chain. Made out of low friction black Polyoxymethylene (POM). Four stainless M6 Hex bolts and Nylocks included. The shackle is not included.

Size	S	M	L
A4I Code	RGCSSD	RGC5MD	RGC5LG
Commercial Name	Chain Slider Small	Chain Slider Medium	Chain Slider Large
Chain Compatible	4x12 mm 5x15 mm	6x18 mm 6.3x19 mm 7x22 mm	8x24 mm

Touring Slider

The touring slider is designed for cable management in entertainment rigging system. It is made in one piece with two fixing points for cable such as power, control, data or audio cables to get attached. No tool is required whilst putting chain slider in the chain.

Size	S	M	L	XL
A4I Code	RGCSTSM	RGCSTMD	RGCSTLG	RGCSTXL
Commercial Name	Chain Slider Small	Chain Slider Medium	Chain Slider Large	Chain Slider Extra Large
Chain Compatible	4x12mm 5x15mm	6x18mm 6.3x19 mm 7x22mm	8x24mm	10x28mm 11.3x31mm 13x36mm

EX3
RISE

EX3
ACE

EX3
VARIO

ACCESSORIES

HOOK



Self Locking Swivel Hooks

The self locking swivel hooks are extremely safe because of the self closing latch and the way the hook is constructed prevents the hook from opening when under load. (Available in black and red color)

Size	S	M	L
Commercial Name	Latch Lock Hook Small	Latch Lock Hook Medium	Latch Lock Hook Large
Chain Hoist Compatible	MEDIUM FRAME ULTRA COMPACT MEDIUM FRAME COMPACT MEDIUM FRAME	LARGE FRAME 1 REEVE	EXTRA LARGE FRAME 1 REEVE



Lifting Lug Bracket

The fixed body hook is the alternative to the swivel one when the latter is not suitable for your installation.

A4i Code: LLB 2000

Chain Hoist Compatibility	Medium Frame Ultra Compact Medium Frame Compact	Medium Frame	Large Frame
---------------------------	--	--------------	-------------

UPGRADES

Encoder

INCREMENTAL ENCODER

Most of the incremental encoders produce square waves signals but also sinusoidal signals and can provide travel, position, displacement and velocity information; positional information is relative, this means that it is possible to know both if the axis is rotating and if it is rotating clockwise or counterclockwise; but it is not possible to gather information about the absolute position of the axis. For this reason the homing operation is always required at the beginning of the process to determine the absolute position of the system (detection of the reference point or zero point). Information is expressed in pulses per revolution (PPR).

ABSOLUTE ENCODER

An absolute encoder is designed to output the absolute position information; it has a unique code pattern, thus it can provide a unique digital code for each angular position of the axis. The main feature is that it is always possible to know exactly the position of the axis. For instance, if you turn off the power supply and move the encoder shaft or the device, then at power on the absolute encoder will output the current position of the axis precisely. This means that no homing operation is required to determine the absolute position.

Limit Switch - Direct Control

More assured using EXE Rise chain hoists with the latest innovative component, the EXE DC Limit Switch Control Module. The new accessory provides a higher level of safety and protection for our medium and large frame chain hoists, combining features from LVC chain hoists and high-specification motor-controllers.



Key features:

- Missing phase detection monitoring
- Automatic power supply sequence recognition
- DC Chain Hoist with limit switch
- Only one cable required to each DC hoist
- Directly compatible with EXE Drive DC Controller

Data Logger

The EXE Data Logger is an innovative device records the real time and lifetime hours, minutes, and seconds of operation, start cycles, real time temperature and relative humidity values as well as the peak temperature and humidity values.

No batteries required. The Data Logger uses the same power source as the hoist circuit and is activated when the hoist is running, and the information is stored within the onboard RAM. The EXE Data Logger can be retrofitted to your existing EXE Technology inventory

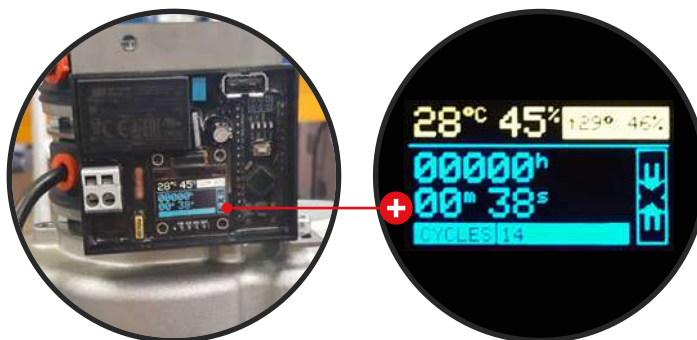

05**HAND CHAIN BLOCK****TON****CE****LIFT****S/NO.****EXE HCB - HAND CHAIN BLOCK**
LIGHTWEIGHT, NOT POWERED
& EASY TO CARRY


The EXE HCB Hand Chain Block is the new family of products, designed to lift loads where it is not possible to use electric chain hoists. The EXE HCB Hand Chain Blocks are compact in size and very light, making it easy to transport and handle. It's operated by hand and is widely used for lifting heavy loads without needing the power supply.

Available with 1000kg capacity with 18 meters of chain. The EXE HCB not only has reasonable structural design, high performance strength, but also has the advantages of safety, reliability, easy maintenance and durability.

EXE
HCB

HCB 1000kg

HAND CHAIN BLOCK

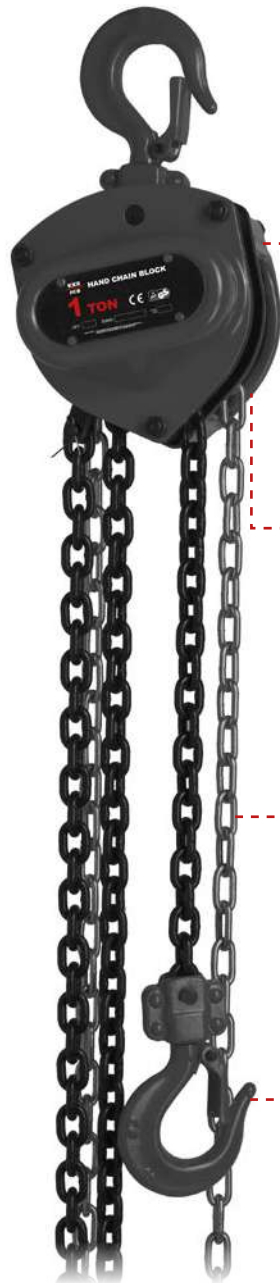

BLACK CHASSIS



LOAD WHEEL



CHAIN




CHAIN HOOK

EXE HCB 1000kg HAND CHAIN BLOCK

GENERAL FEATURES

MODEL	EXE HCB Hand Chain Block 1000kg
TYPE	Manual hoist
WLL	1000kg
LOAD CHAIN SIZE	6x18mm
LOAD CHAIN LENGHT	18m
HAND CHAIN LENGHT	36m
BODY COLOUR	Black

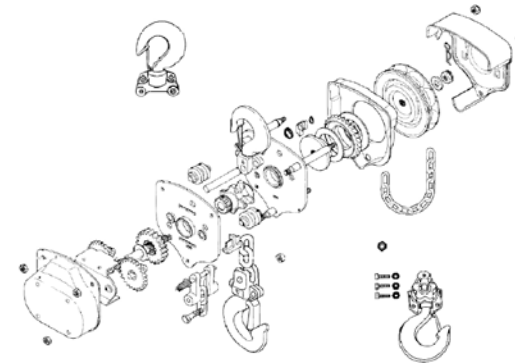

06

EXE IBEAM BEAM TROLLEY SYSTEM

The EXE iBeam Trolleys are a mobile anchorage point that can be fitted onto a lifting beam to suspend lifting equipment beneath, such as a chain hoist. This allows the load to travel along the direction of the lifting beam.

The EXE iBeam Trolleys are designed for HEA/IPE 100/200mm ADJUSTABLE.

WLL 1200kg with safety factor 5:1
(in combination with chain hoist).

WLL 1500kg with safety factor 4:1

01

EXE DRIVE CONTROLLER PRACTICAL, SELECTABLE & WIDE RANGE

EXE Drive controllers are classified as either Basic or Linkable. Basic units allow for simple control without the ability to group units together whereas linkable units can be connected and operated altogether at the same time, allowing you to use up to 9 EXE Drive controllers or 8 drive controllers plus one remote.

The Basic 3-phase direct or low voltage control units are available in 4 or 8 channel modules. The Linkable 3-phase direct or low voltage control units are available in 4, 6, 8, 16, or 24 channel modules. Specialty units include the 8-channel wireless direct control unit and the single-phase 4-channel unit.

To operate hoists connected to EXE Drive controllers, a variety of remotes, pendants, and pickles are available. For the standalone hoist there's the standard single channel or 2-channel pickle, while for the Linkable Drive series there's multichannel solutions or simple pendants with stop-go or stop-go-reverse buttons, all of which are capable of performing without voltage drop or signal interruption with an XLR cable of up to 100 meters.

Possibility to customize for any voltage, frequency, plug, and socket requirements based on the electrical standards of your country.

Overview

3-PH CONTROLLERS

CHANNELS	LINKABLE	DIRECT CONTROL	LOW VOLTAGE CONTROL	DIGITAL REMOTE CONTROL			
1	✗		 XDRH1C-LV				
	✗	 LDDH1					
2	✗	 LDDH2					
4	✗	 Xddb4	 Xddb4-LV				
	✓	 XDDL4	 XDDL4-LV	 XDRHG	 XDRHGR	 XDRH4C	
	✗	 XDDC4	✗	 XDRHGC			
8	✗	 Xddb8	 Xddb8-LV				
	✓	 XDDL8	 XDDL8-LV	 XDRHG	 XDRHGR	 XDRH8C	
	✓	 XDDL8-H		 XDRHG	 XDRHGR	 XDRH8C	
	✗	 XDDW8	✗				
	✗	 XDDC8	✗	 XDRHGC			
16	✓	 XDDL16	 XDDL16-LV	 XDRHG	 XDRHGR	 XDRH16C	
24	✓	 XDDL24	 XDDL24-LV	 XDRHG	 XDRHGR	 XDRH24C	

EX3
DRIVE

DH1

DIRECT CONTROL



LDDH1

1 CHANNEL PENDANT PUSH BUTTON

KEY FEATURES

Double-isolated yellow keypad in polyester

1 x Emergency Stop button

2 x mechanical interlock UP-DOWN switches (requires operator to be present)

Compatible with most chain hoists available on the market

TECHNICAL SPECIFICATIONS

MAX POWER: 2.2kW

POWER SUPPLY: 1 plug CEE 230/400VAC 16A
6H 3P+N+T IP67
with mechanical phase inverter

OUTPUTS: 1 x CEE 400VAC 16A
6H 3P+T IP67 flying plug

RATED OPERATIONAL CURRENT PER OUTPUT: 10A in AC3 – AC4

AMBIENT TEMPERATURE - STORAGE: -25°C/+70°C

AMBIENT TEMPERATURE - OPERATION: -25°C/+40°C

DIMENSIONS: 200x85x75.4 mm

WEIGHT: 1.5 kg



LDDH2

2 CHANNEL PENDANT PUSH BUTTON

KEY FEATURES

- Double-isolated yellow keypad in polyester
- 1 x Emergency Stop button
- 2 x mechanical interlock UP-DOWN switches (requires operator to be present)
- Compatible with most chain hoists available on the market

TECHNICAL SPECIFICATIONS

MAX POWER:	2.2kW
POWER SUPPLY:	1 plug CEE 230/400VAC 16A 6H 3P+N+T IP67 with mechanical phase inverter
OUTPUTS:	2 x CEE 400VAC 16A 6H 3P+T IP67 flying plug
RATED OPERATIONAL CURRENT PER OUTPUT:	5A in AC3 – AC4
AMBIENT TEMPERATURE - STORAGE:	-25°C/+70°C
AMBIENT TEMPERATURE - OPERATION:	-25°C/+40°C
DIMENSIONS:	310x98x76 mm
WEIGHT:	2.0 kg

**EX3
DRIVE**

DB4

DIRECT CONTROL



XDDB4

4 CHANNEL BASIC CONTROLLER


KEY FEATURES - DIRECT CONTROL

- 3 Neon light for power supply indication
- MCB 16A & GFI Breaker (30mA)
- Emergency stop button
- White GO button
- 4 x 3-travel direction selectors (UP-OFF-DOWN)


TECHNICAL SPECIFICATIONS

POWER SUPPLY:	1 plug CEE 230/400VAC 32A 6H 3+P+N+E with mechanical phase inverter
OUTPUTS:	4 x CEE 400VAC 16A 6H 3P+T IP67 flying plug
DIMENSIONS:	3U rack box 260mm depth
WEIGHT:	12 kg

FRONT VIEW



BACK VIEW

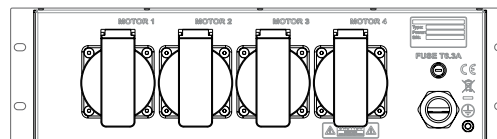

**EX3
DRIVE**

DB4-LV

LOW VOLTAGE CONTROL



XDSP2-LV
BREAK OUT ADAPTER MULTI-PIN
LOW VOLTAGE CONTROL

This adapter is used to split the Multi-Pin outlets out to 16amp power and control connectors to enable connection to chain hoists



XDDB4-LV

4 CHANNEL BASIC CONTROLLER

KEY FEATURES - LOW VOLTAGE CONTROL


- 3 Neon light for power supply indication
- MCB 16A & GFI Breaker (30mA)
- Emergency stop button
- White GO button
- 4 x 3-travel direction selectors (UP-OFF-DOWN)
- Protection General Contactor
- Pickle Power

TECHNICAL SPECIFICATIONS

POWER SUPPLY:	230/400VAC 32A 6H 3+P+N+E with mechanical phase inverter
OUTPUTS:	2 x 19 pin circular multi-pin female connector. Two channel power and 2 channel control per connector
DIMENSIONS:	3U rack box 260mm depth
WEIGHT:	12 kg

FRONT VIEW

BACK VIEW

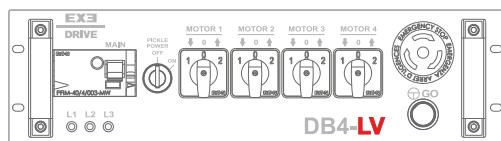

CONTROLLER

**EX3
DRIVE**

DB8

DIRECT CONTROL



XDDB8

8 CHANNEL BASIC CONTROLLER


KEY FEATURES - DIRECT CONTROL

- 3 Neon light for power supply indication
- MCB 16A & GFI Breaker (30mA)
- Emergency stop button
- White GO button
- 8 x 3-travel direction selectors (UP-OFF-DOWN)
- Protection General Contactor


TECHNICAL SPECIFICATIONS

POWER SUPPLY:	1 plug CEE 230/400VAC 16A 6H 3+P+N+E with mechanical phase inverter
OUTPUTS:	8 x CEE 400VAC 16A 6H 3 P+E IP67 panel sockets
DIMENSIONS:	5U rack box 260mm depth
WEIGHT:	17 kg

FRONT VIEW

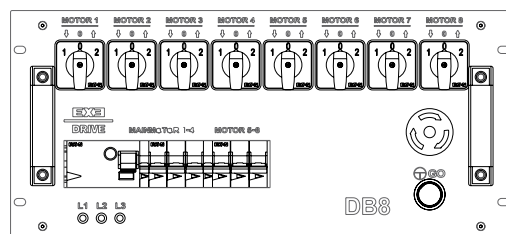

BACK VIEW

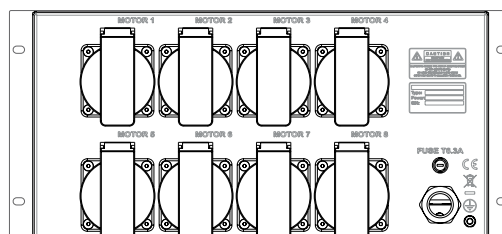

**EX3
DRIVE**

DB8-LV

LOW VOLTAGE CONTROL



XDSP2-LV
BREAK OUT ADAPTER MULTI-PIN
LOW VOLTAGE CONTROL

This adapter is used to split the Multi-Pin outlets out to 16amp power and control connectors to enable connection to chain hoists



XDDB8-LV

8 CHANNEL BASIC CONTROLLER

KEY FEATURES - LOW VOLTAGE CONTROL



- 3 Neon light for power supply indication
- GFI 40A (30mA)
- 2 MCB 16A w/link functions between MCB and General Contactor for magneto-thermal cut off
- Emergency stop button
- White GO button
- 8 x 3-travel direction selectors (UP-OFF-DOWN)
- Protection General Contactor
- Pickle Power

TECHNICAL SPECIFICATIONS

POWER SUPPLY:	1 plug CEE 230/400VAC 32A 6H 3+P+N+E with mechanical phase inverter
OUTPUTS:	4 x 19 pin circular multi-pin female connector. 2 channel power and 2 channel control per connector
DIMENSIONS:	5U rack box 260mm depth
WEIGHT:	18.5 kg

FRONT VIEW

BACK VIEW

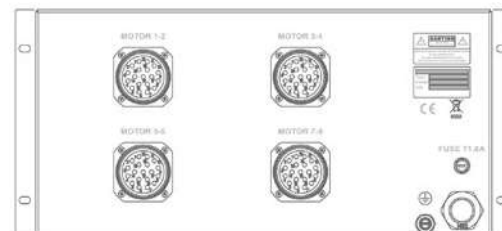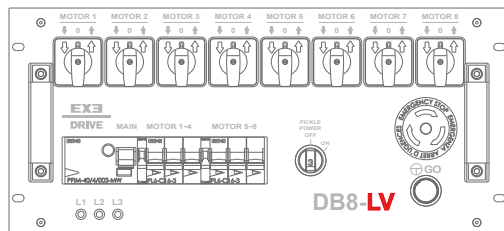


**EX3
DRIVE**

DL4


DIRECT CONTROL



FRONT VIEW

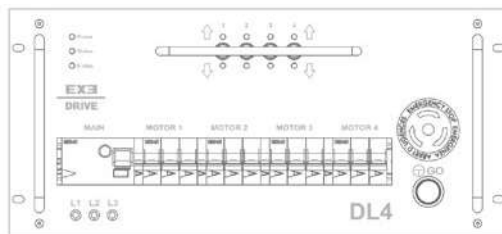

BACK VIEW

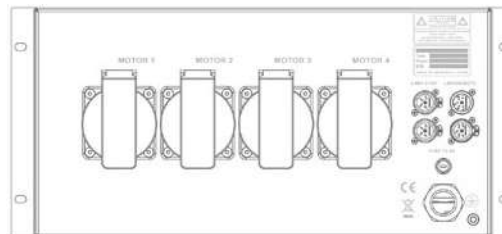

XDDL4

4 CHANNEL MULTILINK CONTROLLER

KEY FEATURES - DIRECT CONTROL

Power Led Light Green / Red for Phase Rotation indication 123 / 132

GFI 40A (30mA)

4 MCB 10A w/link functions between MCB and General Contactor for magneto-thermal cut off

4 x direction contactor reversal

Emergency Stop button

White GO button with light indication

4 x 3-position travel direction switches (UP-OFF-DOWN)

4 x green LED lights indicating channel UP preselection

4 x white LED lights indicating channel DOWN preselection

XLR 5-pole OUT Link panel socket

XLR 5-pole IN Link + REMOTE panel socket

2x XLR 4-pole for load cell / limit switch / E-stop

The unit is supplied with a 1 meter link cable XLR 5-pole male/female

TECHNICAL SPECIFICATIONS

POWER SUPPLY: 1 plug CEE 230/400VAC 32A 6H 3P+N+E with mechanical phase inverter

OUTPUTS: 4 x CEE 400VAC 16A 6H 3P+E panel sockets

DIMENSIONS: 5U rack box 300mm depth

WEIGHT: 21 kg

EX3 DRIVE

DL4-LV

LOW VOLTAGE CONTROL




XDSP2-LV
BREAK OUT ADAPTER MULTI-PIN
LOW VOLTAGE CONTROL

This adapter is used to split the Multi-Pin outlets out to 16amp power and control connectors to enable connection to chain hoists



FRONT VIEW

BACK VIEW

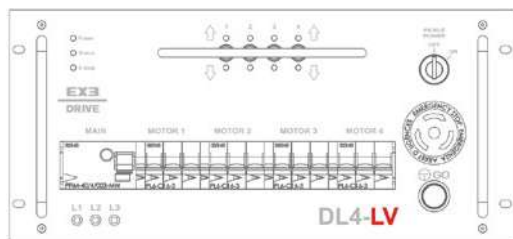

XDDL4-LV

4 CHANNEL MULTILINK CONTROLLER

KEY FEATURES - LOW VOLTAGE CONTROL

- Power Led Light Green / Red for Phase Rotation indication 123 / 132
- GFI 40A (30mA)
- 4 MCB 10A w/link functions between MCB and General Contactor for magneto-thermal Cut off
- 4 x direction contactor reversal
- Emergency Stop button
- White GO button with light indication
- 4 x 3-position travel direction switches (UP-OFF-DOWN)
- 4 x green LED lights indicating channel UP preselection
- 4 x white LED lights indicating channel DOWN preselection
- XLR 5-pole OUT Link panel socket
- XLR 5-pole IN Link + REMOTE panel socket
- 2x XLR 4-pole for load cell / limit switch / E-stop
- The unit is supplied with a 1 meter link cable XLR 5-pole male/female

TECHNICAL SPECIFICATIONS

- POWER SUPPLY:** 1 plug CEE 230/400VAC 32A 6H 3+P+N+E with mechanical phase inverter
- OUTPUTS:** 2 x 19 pin circular multi-pin female connector. 2 channel power and 2 channel control per connector
- DIMENSIONS:** 5U rack box 300mm depth
- WEIGHT:** 21 kg

CONTROLLER


**EX3
DRIVE**

DL8


DIRECT CONTROL



FRONT VIEW

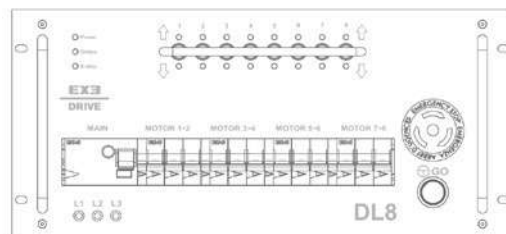

BACK VIEW

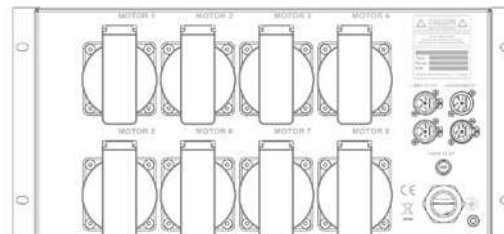

XDDL8

8 CHANNEL MULTILINK CONTROLLER

KEY FEATURES - DIRECT CONTROL

Power Led Light Green / Red for Phase Rotation indication 123 / 132

GFI 40A (30mA)

4 MCB 10A w/link functions between MCB and General Contactor for magneto-thermal cut off

8 x direction contactor reversal

Emergency Stop button

White GO button with light indication

8 x 3-position travel direction switches (UP-OFF-DOWN)

8 x green LED lights indicating channel UP preselection

8 x white LED lights indicating channel DOWN preselection

XLR 5-pole OUT Link panel socket

XLR 5-pole IN Link + REMOTE panel socket

2x XLR 4-pole for load cell / limit switch / E-stop

The unit is supplied with a 1 meter link cable XLR 5-pole male/female

TECHNICAL SPECIFICATIONS

POWER SUPPLY: 1 plug CEE 230/400VAC 32A 6H 3P+N+E with mechanical phase inverter

OUTPUTS: 8 x CEE 400VAC 16A 6H 3P+T panel sockets

DIMENSIONS: 5U rack box 300mm depth

WEIGHT: 25 kg

EX3 DRIVE

DL8-LV

LOW VOLTAGE CONTROL




XDSP2-LV
BREAK OUT ADAPTER MULTI-PIN
LOW VOLTAGE CONTROL

This adapter is used to split the Multi-Pin outlets out to 16amp power and control connectors to enable connection to chain hoists



FRONT VIEW

BACK VIEW

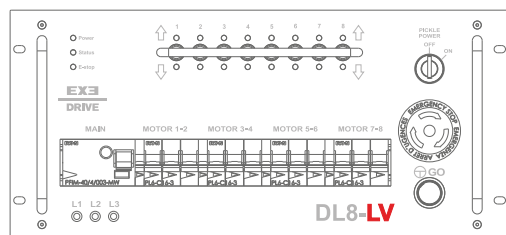

XDDL8-LV

8 CHANNEL MULTILINK CONTROLLER

KEY FEATURES - LOW VOLTAGE CONTROL

- Power Led Light Green / Red for Phase Rotation indication 123 / 132
- GFI 40A (30mA)
- 4 MCB 10A w/link functions between MCB and General Contactor for magneto-thermal Cut off
- 8 x direction contactor reversal
- Emergency Stop button
- White GO button with light indication
- 8 x 3-position travel direction switches (UP-OFF-DOWN)
- 8 x green LED lights indicating channel UP preselection
- 8 x white LED lights indicating channel DOWN preselection
- XLR 5-pole OUT Link panel socket
- XLR 5-pole IN Link + REMOTE panel socket
- 2x XLR 4-pole for load cell / limit switch / E-stop
- The unit is supplied with a 1 meter link cable XLR 5-pole male/female

TECHNICAL SPECIFICATIONS

- POWER SUPPLY:** 1 plug CEE 230/400VAC 32A 6H 3+N+E with mechanical phase inverter
- OUTPUTS:** 2 x 19 pin circular multi-pin female connector. 2 channel power and 2 channel control per connector
- DIMENSIONS:** 5U rack box 300mm depth
- WEIGHT:** 25 kg

CONTROLLER


**EX3
DRIVE**

DL8H


DIRECT CONTROL



FRONT VIEW

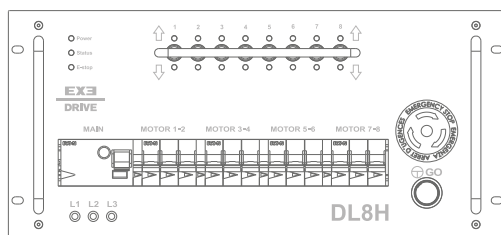

BACK VIEW

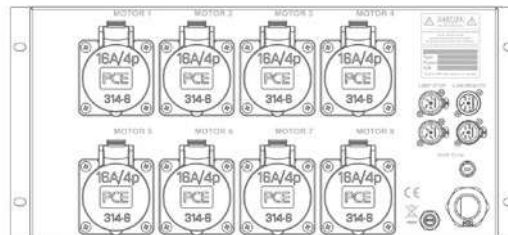

XDDL8H

8 CHANNEL HIGH MULTILINK CONTROLLER

KEY FEATURES - DIRECT CONTROL

- Power Led Light Green / Red for Phase Rotation indication 123 / 132
- GFI 40A (30mA)
- 4 MCB 10A w/link functions between MCB and General Contactor for magneto-thermal cut off
- 8 x direction contactor reversal
- Emergency Stop button
- White GO button with light indication
- 8 x 3-position travel direction switches (UP-OFF-DOWN)
- 8 x green LED lights indicating channel UP preselection
- 8 x white LED lights indicating channel DOWN preselection
- XLR 5-pole OUT Link panel socket
- XLR 5-pole IN Link + REMOTE panel socket
- 2x XLR 4-pole for load cell / limit switch / E-stop
- The unit is supplied with a 1 meter link cable XLR 5-pole male/female

TECHNICAL SPECIFICATIONS

- POWER SUPPLY:** 1 plug CEE 230/400VAC 63A 6H 3 P+N+E with mechanical phase inverter
- OUTPUTS:** 8 x CEE 400VAC 16A 6H 3P+T panel sockets
- DIMENSIONS:** 5U rack box 300mm depth
- WEIGHT:** 27.5 kg

- Power
- Status
- E-stop

EX3
DRIVE

MAIN

MOTOR 1-2

MOTOR 3-4

MOTOR 5-6

DL8H

L1 L2 L3



1

2

3

4

7

8



FAT-N



TEST

FAT-N

FAT-N


FAT-N

FAT-N






FRONT VIEW



BACK VIEW



XDDL16

16 CHANNEL MULTILINK CONTROLLER

KEY FEATURES - DIRECT CONTROL

Power Led Light Green / Red for Phase Rotation indication 123 / 132

GFI 40A (30mA)

8 MCB 10A w/link functions between MCB and General Contactor for magneto-thermal cut off

16 x direction contactor reversal

Emergency Stop button

White GO button with light indication

16 x 3-position travel direction switches (UP-OFF-DOWN)

16 x green LED lights indicating channel UP preselection

16 x white LED lights indicating channel DOWN preselection

XLR 5-pole OUT Link panel socket

XLR 5-pole IN Link + REMOTE panel socket

2x XLR 4-pole for load cell / limit switch / E-stop

The unit is supplied with a 2 meters link cable XLR 5-pole male/female

TECHNICAL SPECIFICATIONS

POWER SUPPLY: 1 plug CEE 230/400VAC 63A 6H 3 P+N+E with mechanical phase inverter

OUTPUTS: 16 x CEE 400VAC 16A 6H 3P+E panel sockets

DIMENSIONS: 12U rack box 300mm depth

WEIGHT: 44 kg

**EX3
DRIVE**

DL16-LV

LOW VOLTAGE CONTROL




XDSP2-LV
BREAK OUT ADAPTER MULTI-PIN
LOW VOLTAGE CONTROL


This adapter is used to split the Multi-Pin outlets out to 16amp power and control connectors to enable connection to chain hoists



FRONT VIEW



BACK VIEW



XDDL16-LV

16 CHANNEL MULTILINK CONTROLLER

KEY FEATURES - LOW VOLTAGE CONTROL

- Power Led Light Green / Red for Phase Rotation indication 123 / 132
- GFI 40A (30mA)
- 8 MCB 10A w/link functions between MCB and General Contactor for magneto-thermal Cut off
- 16 x direction contactor reversal
- Emergency Stop button
- White GO button with light indication
- 16 x 3-position travel direction switches (UP-OFF-DOWN)
- 16 x green LED lights indicating channel UP preselection
- 16 x white LED lights indicating channel DOWN preselection
- XLR 5-pole OUT Link panel socket
- XLR 5-pole IN Link + REMOTE panel socket
- 2x XLR 4-pole for load cell / limit switch / E-stop
- The unit is supplied with a 1 meter link cable XLR 5-pole male/female
- Pickle function

TECHNICAL SPECIFICATIONS

- POWER SUPPLY:** 1 plug CEE 230/400VAC 63A 6H 3+P+N+E with mechanical phase inverter
- OUTPUTS:** 8 x 19 pin circular multi-pin female connector. 2 channel power and 2 channel control per connector
- DIMENSIONS:** 12U rack box 300mm depth
- WEIGHT:** 44 kg


**EX3
DRIVE**

DL24


DIRECT CONTROL



FRONT VIEW



BACK VIEW



XDDL24

24 CHANNEL MULTILINK CONTROLLER

KEY FEATURES - DIRECT CONTROL

Power Led Light Green / Red for Phase Rotation indication 123 / 132

GFI 40A (30mA)

12 MCB 10A w/link functions between MCB and General Contactor for magneto-thermal cut off

24 x direction contactor reversal

Emergency Stop button

White GO button with light indication

24 x 3-position travel direction switches (UP-OFF-DOWN)

24 x green LED lights indicating channel UP preselection

24 x white LED lights indicating channel DOWN preselection

XLR 5-pole OUT Link panel socket

XLR 5-pole IN Link + REMOTE panel socket

2x XLR 4-pole for load cell / limit switch / E-stop

The unit is supplied with a 2 meters link cable XLR 5-pole male/female

TECHNICAL SPECIFICATIONS

POWER SUPPLY: 1 plug CEE 230/400VAC 63A 6H 3 P+N+E with mechanical phase inverter

OUTPUTS: 24 x CEE 400VAC 16A 6H 3P+E panel sockets

DIMENSIONS: 14U rack box 300mm depth

WEIGHT: 47 kg

**EX3
DRIVE**

DL24-LV

LOW VOLTAGE CONTROL




**XDSP2-LV
BREAK OUT ADAPTER MULTI-PIN
LOW VOLTAGE CONTROL**


This adapter is used to split the Multi-Pin outlets out to 16amp power and control connectors to enable connection to chain hoists



FRONT VIEW



BACK VIEW



XDDL24-LV

24 CHANNEL MULTILINK CONTROLLER

KEY FEATURES - LOW VOLTAGE CONTROL

- Power Led Light Green / Red for Phase Rotation indication 123 / 132
- GFI 40A (30mA)
- 12 MCB 10A w/link functions between MCB and General Contactor for magneto-thermal Cut off
- 24 x direction contactor reversal
- Emergency Stop button
- White GO button with light indication
- 24 x 3-position travel direction switches (UP-OFF-DOWN)
- 24 x green LED lights indicating channel UP preselection
- 24 x white LED lights indicating channel DOWN preselection
- XLR 5-pole OUT Link panel socket
- XLR 5-pole IN Link + REMOTE panel socket
- 2x XLR 4-pole for load cell / limit switch / E-stop
- The unit is supplied with a 2 meter link cable XLR 5-pole male/female
- Pickle function

TECHNICAL SPECIFICATIONS

- POWER SUPPLY:** 1 plug CEE 230/400VAC 63A 6H 3 P+N+E with mechanical phase inverter
- OUTPUTS:** 12 x 19 pin circular multi-pin female connector. 2 channel power and 2 channel control per connector
- DIMENSIONS:** 12U rack box 300mm depth
- WEIGHT:** 47 kg

CONTROLLER

EX3 DRIVE

DW8

WIRELESS CONTROLLER



BASE UNIT

Wireless receiver
Function key switch with OFF/LOCAL/WIRELESS control modes
Charger and storage for the REMOTE unit
LED indication for GO button, wireless signal presence, charger status

REMOTE UNIT

Wireless transmitter
Integrated antenna inside the body
Standard Motorola Li-Ion battery
Battery status indication LED
Beeper alarm function
Device status LED
Metal belt clip

XDDW8

8 CHANNEL WIRELESS CONTROLLER

KEY FEATURES

2.4GHz working frequency with dual encryption
Switches with UP/STAY/DOWN function
GO and Emergency STOP button
Dry contacts on outputs

TECHNICAL SPECIFICATIONS

POWER SUPPLY:	AC230V / 50Hz / 16A
DIMENSIONS:	3U 19" box
WEIGHT:	12.5

Operable only in combination with the DL8 motor controller

FRONT VIEW



BACK VIEW





Power



Status



E-stop

EX3

DRIVE

MAIN

XDDC4R 4 CHANNEL SUITCASE CONTROLLER

KEY FEATURES

- Controls up to 4 direct voltage hoist
- Manual Phase Align (MPA) using power input connector
- Housing in robust plastic case
- Emergency Stop button
- White GO button
- Magneto-thermal cut off
- 4 x 3-cam changeover switch (UP-OFF-DOWN)
- Protection General Contactor

TECHNICAL SPECIFICATIONS

POWER SUPPLY:	CEE 32/5p
OUTPUTS:	RCBO C16A/30mA
DIMENSIONS:	340 x 424 x 173 mm
WEIGHT:	8 kg



XDDC8R 8 CHANNEL SUITCASE CONTROLLER

KEY FEATURES

- Controls up to 8 direct voltage hoist
- Manual Phase Align (MPA) using power input connector
- Housing in robust plastic case
- Emergency Stop button
- White GO button
- Magneto-thermal cut off
- 8 x 3-cam changeover switch (UP-OFF-DOWN)
- Protection General Contactor

TECHNICAL SPECIFICATIONS

POWER SUPPLY:	CEE 32/5p
OUTPUTS:	RCBO C16A/30mA
DIMENSIONS:	406 x 503 x 193 mm
WEIGHT:	11.5 kg

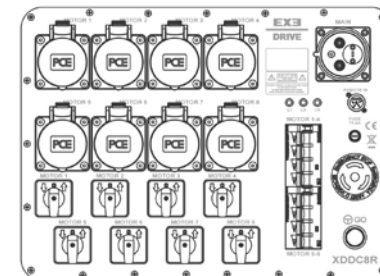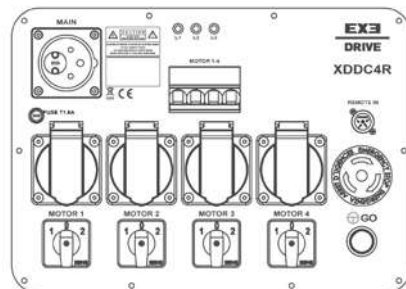



XDDC4R-SP 4 CHANNEL SUITCASE CONTROLLER


KEY FEATURES

- Controls up to 4 direct voltage hoist
- Manual Phase Align (MPA) using power input connector
- Housing in robust plastic case
- Emergency Stop button
- White GO button
- Magneto-thermal cut off
- 4 x 3-cam changeover switch (UP-OFF-DOWN)
- Protection General Contactor

TECHNICAL SPECIFICATIONS

POWER SUPPLY:	CEE 16/3p
OUTPUTS:	RCBO C16A/30mA
DIMENSIONS:	340 x 424 x 173 mm
WEIGHT:	8 kg

FRONT VIEW

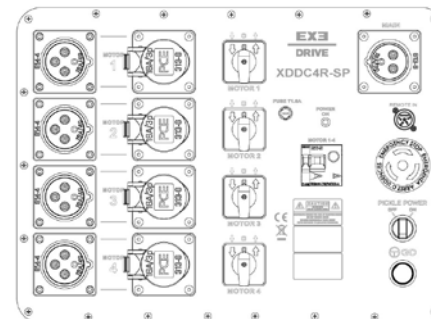

**XDRHG****REMOTE EMERGENCY BUTTON STOP/GO****KEY FEATURES**

Yellow double-isolated pendant push button in self-extinguishing thermoplastic material, applied only to XRL 5-pole OUT Link panel plug provided with the DL controllers

1 x Red stop button

1 x White flashing LED to enable Go function from remote control

1 x Green Go button

Cable length: 15m

1 x XLR 5-pole socket connector

**XDRHGR****REMOTE EMERGENCY BUTTON STOP/GO/REVERSE****KEY FEATURES**

Yellow double-isolated pendant push button in self-extinguishing thermoplastic material, applied only to XRL 5-pole OUT Link panel plug provided with the DL controllers

1 x Red stop button

1 x White flashing LED to enable Go function from remote control

1 x Green Go button

Cable length: 15m

1 x XLR 5-pole socket connector

1 x White button for Reverse function



XDRHGC

CABLE REMOTE WITH GO AND E-STOP BUTTONS

KEY FEATURES

- Simple remote for XDDCR series EXE Drive controllers
- Compatible only with Briefcase Controller DC (4-8 channels)
- GO and E-STOP buttons
- Cable length according to client's needs
- 4-pin NEUTRIK male connector

TECHNICAL SPECIFICATIONS

DIMENSIONS:	260 x 66 x 75 mm
WEIGHT:	0.87 kg

COMPATIBLE WITH

EXE Drive XDDC4R, XDDC8R, XDDC4R-SP briefcase controllers

XDDC4R



XDDC8R



XDDC4R-SP





XDRH4C DIGITAL CABLE REMOTE CONTROL 4 CHANNELS

KEY FEATURES

- 1 x Stop mushroom button
- White GO button with light indication
- 4 x Direction switch with light indication
- 4 Bicolor green / white LED lights indicating channel UP / DOWN preselection
- Bicolor green / orange LED
- Cable XLR5 male-female to be ordered separately

TECHNICAL SPECIFICATIONS

MATERIAL:	Sturdy 2 mm thick aluminium box, gray powder coated pendant push button
DIMENSIONS:	22.5 x 10.6 x 9.5 mm
WEIGHT:	0.9 kg

XDRH8C DIGITAL CABLE REMOTE CONTROL 8 CHANNELS

KEY FEATURES

- 1 x Stop mushroom button
- White GO button with light indication
- 8 x Direction switch with light indication
- 8 Bicolor green / white LED lights indicating channel UP / DOWN preselection
- Bicolor green / orange LED
- Cable XLR5 male-female to be ordered separately

TECHNICAL SPECIFICATIONS

MATERIAL:	Sturdy 2 mm thick aluminium box, gray powder coated pendant push button
DIMENSIONS:	29 x 10.6 x 9.5 mm
WEIGHT:	1.2 kg



XDRH16C DIGITAL CABLE REMOTE CONTROL 16 CHANNELS

KEY FEATURES

- 1 x Stop mushroom button
- White GO button with light indication
- 4 x Direction switch with light indication
- 4 Bicolor green / white LED lights indicating channel UP / DOWN preselection
- Bicolor green / orange LED
- Cable XLR5 male-female to be ordered separately

TECHNICAL SPECIFICATIONS

MATERIAL:	Sturdy 2 mm thick aluminium box, gray powder coated pendant push button
DIMENSIONS:	22.5 x 10.6 x 9.5 mm
WEIGHT:	0.9 kg

XDRH24C DIGITAL CABLE REMOTE CONTROL 24 CHANNELS

KEY FEATURES

- 1 x Stop mushroom button
- White GO button with light indication
- 4 x Direction switch with light indication
- 4 Bicolor green / white LED lights indicating channel UP / DOWN preselection
- Bicolor green / orange LED
- Cable XLR5 male-female to be ordered separately

TECHNICAL SPECIFICATIONS

MATERIAL:	Sturdy 2 mm thick aluminium box, gray powder coated pendant push button
DIMENSIONS:	22.5 x 10.6 x 9.5 mm
WEIGHT:	0.9 kg



XDSP2-LV SPIDER

BREAK-OUT ADAPTER MULTI-PIN

KEY FEATURES

This adapter is required to split the 19 male pin Multi-pin outlets out to 16A CEE connectors to enable connection to chain hoists.

19 Pin circular multi-pin male connector

4 x 100cm long legs wired on 4G 1.5m/sq H07 RNF cable

CEE 16A 6h 400VAC - 3PH + G red socket

CEE 16A 4h 24VAC - 3PH + G yellow plug



XDRH1C-LV PICKLE

1 CHANNEL UP-DOWN

KEY FEATURES

Double insulated enclosures in thermoplastic self-extinguishing material

IP65 rating

Operating temperature -25° +70°C

2 directions mechanically interlocked: UP & DOWN

EXE DRIVE

COMPATIBILITY CHART

EXE TECHNOLOGY MOTOR CONTROLLER		EXE CHAIN HOIST						
		250kg	500kg	1000kg 1 REEVE	2000kg 2 REEVES	1600kg	2000kg 1 REEVE	2500kg 1 REEVE
	 XDRH1C-LV	✓	✓	✓	✓	✓	✓	✗
 LDDH1	 LDDH2	✓	✓	✓	✓/✗	✓/✗	✗	✗
 XDDL4	 XDDL4-LV	✓	✓	✓	✓	✓	✓	✗
 XDDL8	 XDDL8-LV	✓	✓	✓	✗	✗	✗	✗
 XDDL8H		✓	✓	✓	✓	✓	✓	✓
 XDDL16	 XDDL16-LV	✓	✓	✓	✗	✗	✗	✗
 XDDL24	 XDDL24-LV	✓	✓	✓	✗	✗	✗	✗
 Xddb4	 Xddb4-LV	✓	✓	✓	✗	✗	✗	✗
 Xddb8	 Xddb8-LV	✓	✓	✓	✗	✗	✗	✗
 XDDC4R		✓	✓	✓	✗	✗	✗	✗
 XDDC8R		✓	✓	✓	✗	✗	✗	✗

The values in the table refer to the standard **EXE Drive** Motor Controller.

On request the **EXE Drive** Motor Controllers can be customized. Contact our technical office for more information.

EXE
SENSE**EXE SENSE CONTROLLER**
INTUITIVE TOUCH AND QUICK

Precision at your fingertips. Control EXE Rise hoists through the digital touchscreen of the **EXE Sense**, the latest linkable hoist controller by EXE Technology. Command up to 64 hoists individually or in groupings by connecting linkable 8-channel EXE Sense units.

Use the touchscreen to either manually jog hoists into position or input the exact target. Alternatively, control hoists with the multi-channel touchscreen remote.

This international, One for All solution is available for either 208 or 400 volt power, depending on which configuration you require for saving events in your country. The system reliably communicates with any fixed speed hoists over distances up to 15 meters through XLR10 cable.




Overview

TOUCHSCREEN CONTROLLER - DL8S V2 6U

	MODEL	CONTROL	CHANNELS	POWER SUPPLY	OUTPUT	DIMENSION	REMOTE
	DL8S-1 V2 6U	DC	8	1xCEE 32A/5P	8xCEE - 4P	6U	
	DL8S-2 V2 6U				8xCEE - 4P + 2xHARTING -16P		
	DL8S-3 V2 6U				8xCEE - 4P + 2xSOCAPEX -19P		



Touchscreen

Precision at your fingertips. Touchscreen display to facilitate movement operations and independently manage the groups.



Power Supply Type

Customization of the power supply type (plug and socket) according to specific needs: CEE or CEE+Harting or CEE+Socapex



Group Control

EXE Sense provides intuitive and versatile control, including group control through the touchscreen.



Remote Control

Alternatively, control hoists with the multi-channel touchscreen remote.



Features

Linkable

Command up to 64 hoists individually or in groupings by connecting linkable 8 channel EXE Sense units.



Chain Hoist Compatibility

The system reliably communicates with any fixed speed hoists over distances up to 100 meters through Cat5e cable.



FIXED SPEED

The EXE SENSE controller operates at a fixed speed, ensuring consistent performance.



**EX3
SENSE**

DL8S V2 6U

TOUCHSCREEN CONTROLLER



**COMPATIBLE WITH
XNDLRH REMOTE CONTROL**

DL8S V2 6U

8 CHANNEL 6 RACK UNITS

KEY FEATURES

- LED Touch multi-color display
- GFI 40A (30mA)
- 4 MCB 10A w/link functions between MCB and general contactor for magneto-thermal cut off
- 8x reversing contactor
- Emergency Stop mushroom button
- White GO button
- RJ45 LINK OUT
- RJ45 LINK IN
- Fuse 2A

1 CEE	2 CEE + HARTING	3 CEE + SOCAPEX
POWER SUPPLY		
1 Plug CEE 230/400VAC 32A 6H 3P+N+T	1 Plug CEE 230/400VAC 32A 6H3P+N+T	1 Plug CEE 230/400VAC 32A 6H 3P+N+T
OUTPUTS		
8 x CEE 400VAC 16A 6H 3P+T panel sockets	8 x CEE 400VAC 16A 6H 3P+T panel sockets + 2 ILME - 16p	8 x CEE 400VAC 16A 6H 3P+T panel sockets + 2 SOCAPEX - 19p
DIMENSIONS		
6U RACK BOX 300mm depth	6U RACK BOX 300mm depth	6U RACK BOX 300mm depth
WEIGHT		
30kg	30kg	30kg



XNDLRH

REMOTE HANDLE TOUCHSCREEN CONTROL

KEY FEATURES


- LED Touchscreen multi-color display
- Emergency Stop mushroom button
- White GO button
- RJ45 connector
- The unit is supplied with maximum 15 meters link cable connector

TECHNICAL SPECIFICATIONS

OUTPUTS:	RJ45 connector
WEIGHT:	5kg



FRONT VIEW


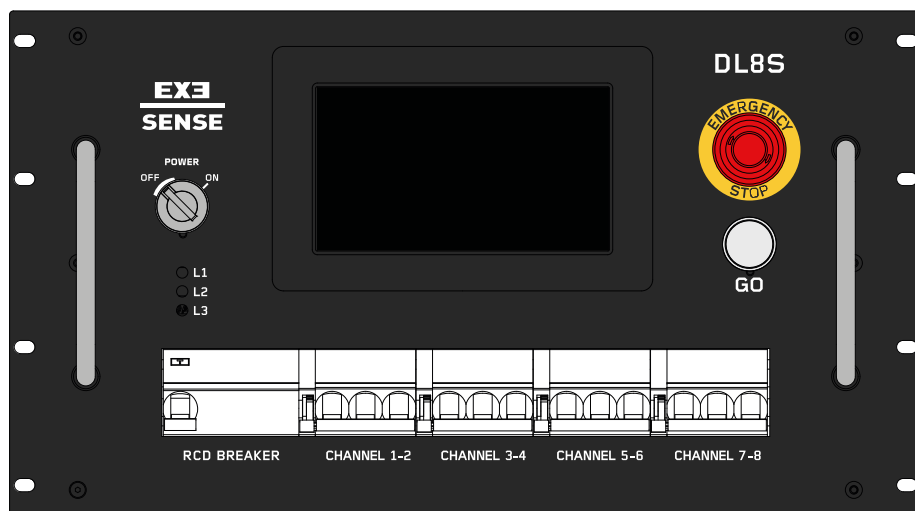


3 CONFIGURATIONS


DL8S-1 CEE

DL8S-2 CEE + HARTING


DL8S-3 CEE + SOCAPEX




DL8S-1 CEE

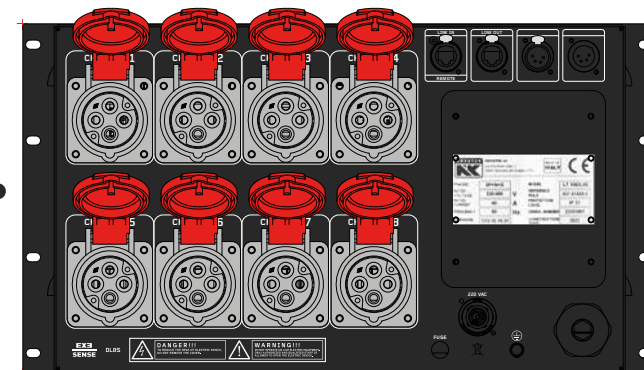

DL8S-2 CEE + HARTING

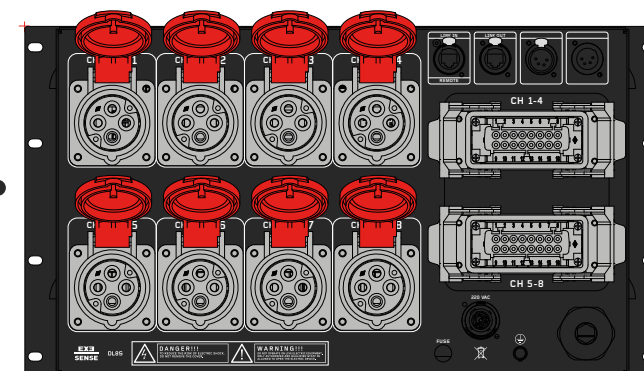





DL8S-3 CEE + SOCAPEX

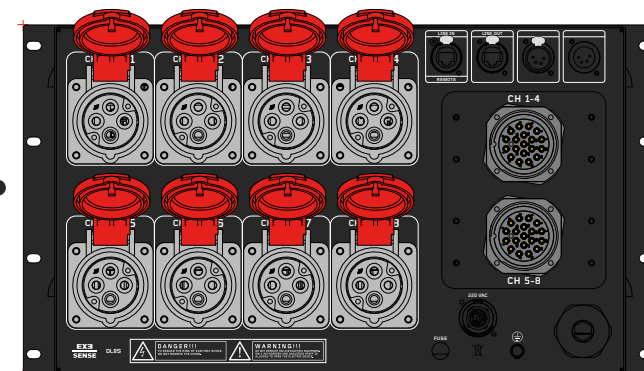

DL8S-1 CEE

TECHNICAL SPECIFICATIONS

POWER SUPPLY	1 Plug CEE 230/400VAC 32A 6H 3P+N+T
OUTPUTS	8 x CEE 400VAC 16A 6H 3P+T panel sockets
DIMENSIONS	6U RACK BOX 300mm depth
WEIGHT	30kg

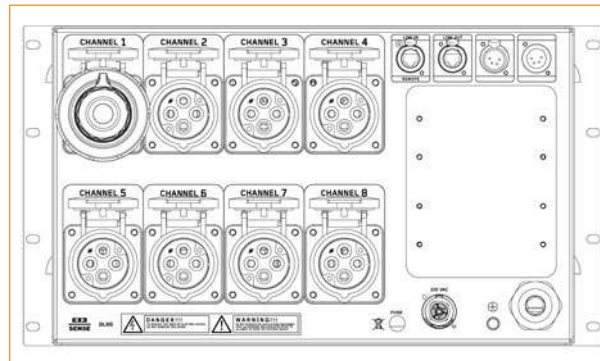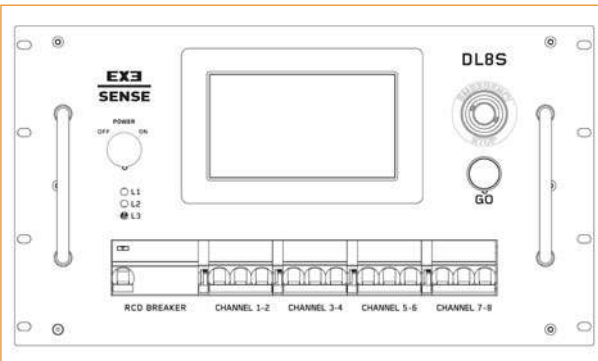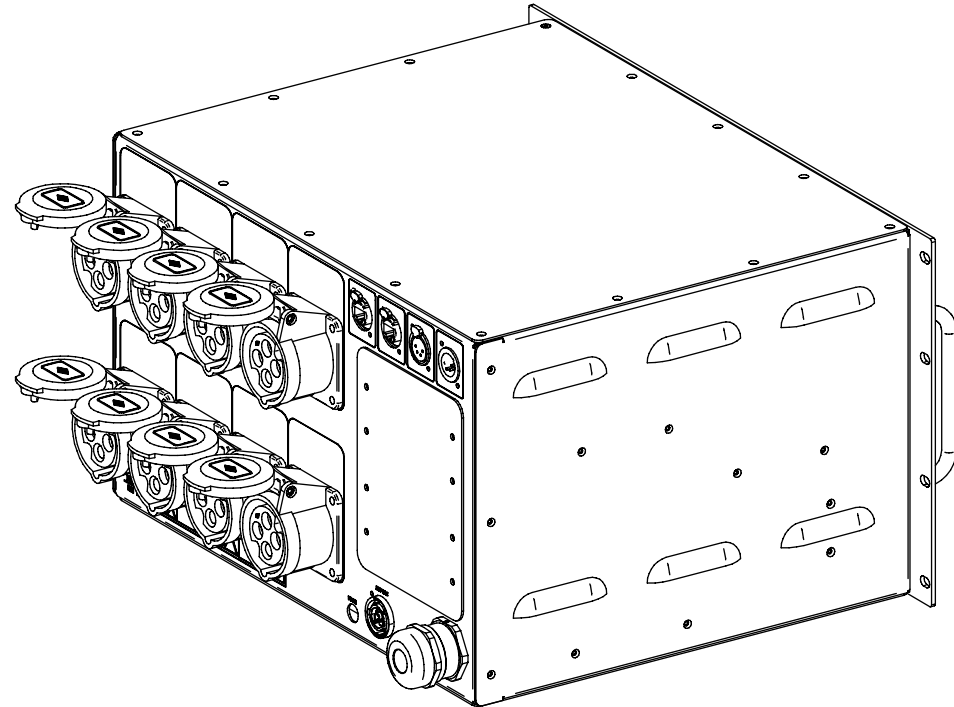


CEE plug

HARTING WIRING DIAGRAM

MOTOR	PIN	DESCRIPTION
MOTOR 1	PIN 1	L1
	PIN 5	L2
	PIN 9	L3
	PIN 13	PE
MOTOR 2	PIN 2	L1
	PIN 6	L2
	PIN 10	L3
	PIN 14	PE
MOTOR 3	PIN 3	L1
	PIN 7	L2
	PIN 11	L3
	PIN 15	PE
MOTOR 4	PIN 4	L1
	PIN 8	L2
	PIN 12	L3
	PIN 16	PE
	BODY	PE


L1 Phase 1 ———
 L2 Phase 2 ———
 L3 Phase 3 ———
 NC Not connected
 PE Earth

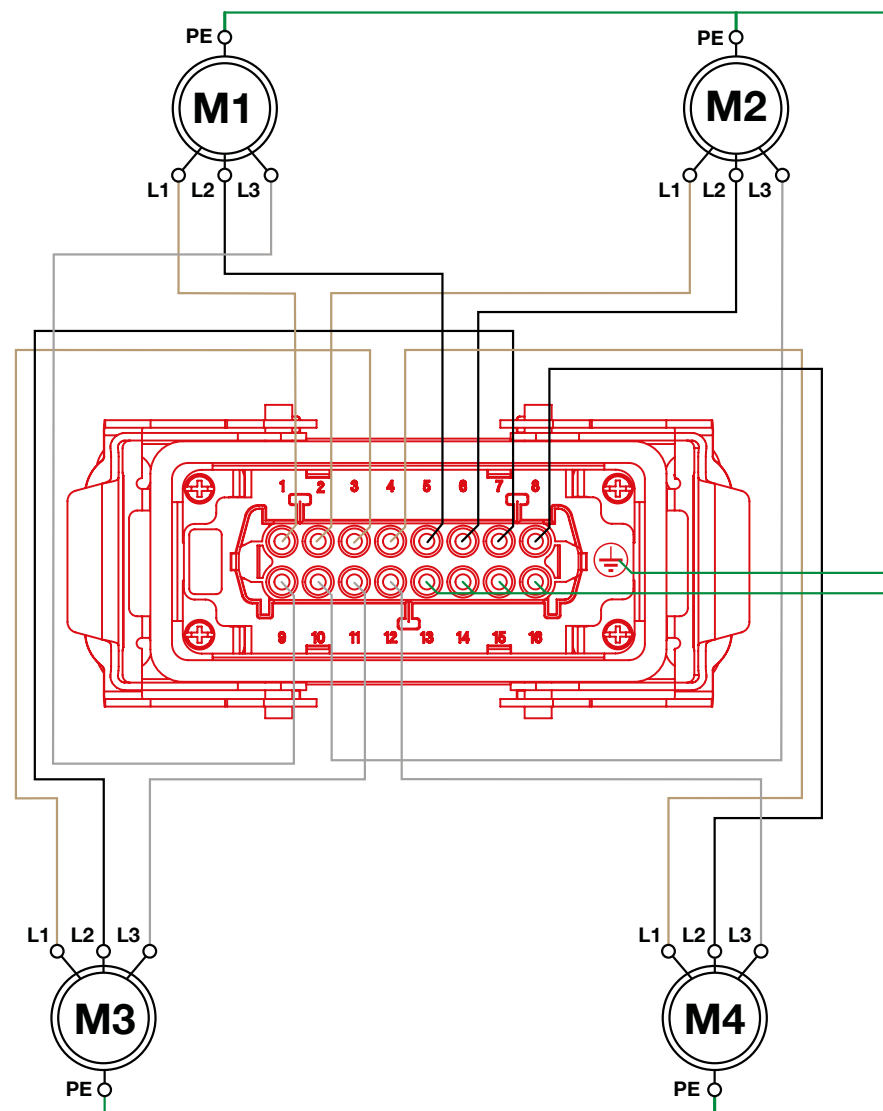

HARTING WIRING OPTIONS

PIN	STANDARD OPTION A	OPTION B*	OPTION C*	OPTION D*	OPTION E*	OPTION F*
PIN 1	Motor 1 L1	Motor 1 L1	Motor 1 L1	Motor 1 L1	Motor 1 L1	Motor 1 L1
PIN 2	Motor 2 L1	Motor 1 L2	Motor 1 L2	Motor 1 L2	Motor 1 L2	Motor 1 L2
PIN 3	Motor 3 L1	Motor 1 L3	Motor 1 L3	Motor 1 L3	Motor 1 L3	Motor 1 L3
PIN 4	Motor 4 L1	Motor 1 PE	Motor 2 L1	Motor 2 L1	Motor 2 L1	Motor 2 L1
PIN 5	Motor 1 L2	Motor 2 L1	Motor 2 L2	Motor 2 L2	Motor 2 L2	Motor 2 L2
PIN 6	Motor 2 L2	Motor 2 L2	Motor 2 L3	Motor 2 L3	Motor 2 L3	Motor 2 L3
PIN 7	Motor 3 L2	Motor 2 L3	Motor 1 PE	NC	Motor 3 L1	Motor 3 L1
PIN 8	Motor 4 L2	Motor 2 PE	Motor 2 PE	NC	Motor 3 L2	Motor 3 L2
PIN 9	Motor 1 L3	Motor 3 L1	Motor 3 L1	Motor 3 L1	Motor 3 L3	Motor 3 L3
PIN 10	Motor 2 L3	Motor 3 L2	Motor 3 L2	Motor 3 L2	Motor 4 L1	Motor 4 L1
PIN 11	Motor 3 L3	Motor 3 L3	Motor 3 L3	Motor 3 L3	Motor 4 L2	Motor 4 L2
PIN 12	Motor 4 L3	Motor 4 PE	Motor 4 L1	Motor 4 L1	Motor 4 L3	Motor 4 L3
PIN 13	Motor 1 PE	Motor 4 L1	Motor 4 L2	Motor 4 L2	NC	Motor 1 PE
PIN 14	Motor 2 PE	Motor 4 L2	Motor 4 L3	Motor 4 L3	NC	Motor 2 PE
PIN 15	Motor 3 PE	Motor 4 L3	Motor 3 PE	NC	NC	Motor 3 PE
PIN 16	Motor 4 PE	Motor 4 PE	Motor 4 PE	NC	NC	Motor 4 PE
BODY	PE	PE	NC	PE	PE	PE


* Available only upon specific request

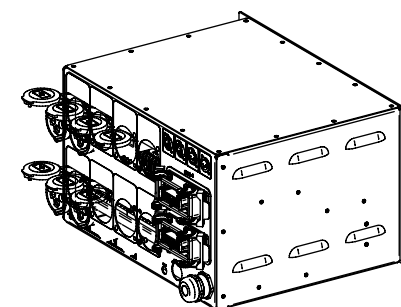

SOCAPEX STANDARD WIRING DIAGRAM

MOTOR	IN	DESCRIPTION
MOTOR 1	PIN 1 PIN 2 PIN 3 PIN 13	L1 L2 L3 PE
MOTOR 2	PIN 4 PIN 5 PIN 6 PIN 14	L1 L2 L3 PE
MOTOR 3	PIN 7 PIN 8 PIN 9 PIN 15	L1 L2 L3 PE
MOTOR 4	PIN 10 PIN 11 PIN 12 PIN 16	L1 L2 L3 PE
	PIN 17 PIN 18 PIN 19	NC NC NC


L1 Phase 1 ———
 L2 Phase 2 ———
 L3 Phase 3 ———
 NC Not connected
 PE Earth

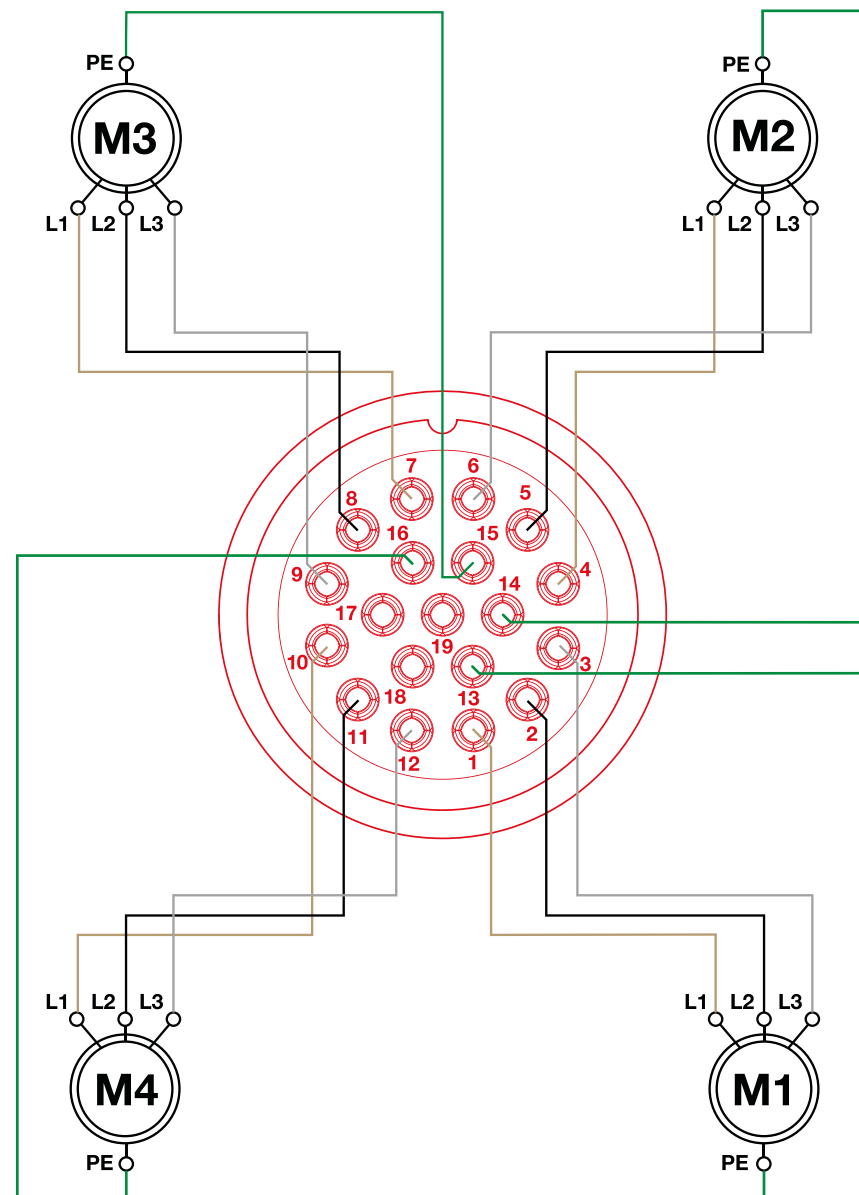

SOCAPEX WIRING OPTIONS

PIN	STANDARD OPTION A	OPTION B [☆]	OPTION C [☆]	OPTION D [☆]	OPTION E [☆]	OPTION F [☆]
PIN 1	Motor 1 L1	Motor 1 L1	Motor 1 L1	Motor 1 L1	Motor 1 L1	Motor 1 L1
PIN 2	Motor 1 L2	Motor 1 L2	Motor 1 L2	Motor 1 L2	Motor 2 L1	Motor 2 L1
PIN 3	Motor 1 L3	Motor 1 L3	Motor 1 L3	Motor 1 L3	Motor 1 L2	Motor 1 L2
PIN 4	Motor 2 L1	Motor 2 L1	Motor 2 L1	Motor 2 L1	Motor 2 L2	Motor 2 L2
PIN 5	Motor 2 L2	Motor 2 L2	Motor 2 L2	Motor 2 L2	Motor 1 L3	Motor 1 L3
PIN 6	Motor 2 L3	Motor 2 L3	Motor 2 L3	Motor 2 L3	Motor 2 L3	Motor 2 L3
PIN 7	Motor 3 L1	Motor 3 L1	Motor 3 L1	Motor 3 L1	Motor 3 L1	Motor 3 L1
PIN 8	Motor 3 L2	Motor 3 L2	Motor 3 L2	Motor 3 L2	Motor 4 L1	Motor 4 L1
PIN 9	Motor 3 L3	Motor 3 L3	Motor 3 L3	Motor 3 L3	Motor 3 L2	Motor 3 L2
PIN 10	Motor 4 L1	Motor 4 L1	Motor 4 L1	Motor 4 L1	Motor 4 L2	Motor 4 L2
PIN 11	Motor 4 L2	Motor 4 L2	Motor 4 L2	Motor 4 L2	Motor 3 L3	Motor 3 L3
PIN 12	Motor 4 L3	Motor 4 L3	Motor 4 L3	Motor 4 L3	Motor 4 L3	Motor 4 L3
PIN 13	Earth 1	Earth 1	Earth	Earth 1	Earth 1	Earth
PIN 14	Earth 2	Earth 2	Earth	NC	Earth 2	Earth
PIN 15	Earth 3	Earth 3	Earth	Earth 2	Earth 3	Earth
PIN 16	Earth 4	Earth 4	Earth	Earth 3	Earth 4	Earth
PIN 17	NC	Earth	Earth	NC	NC	Earth
PIN 18	NC	Earth	Earth	Earth 4	NC	Earth
PIN 19	NC	Earth	Earth	NC	NC	NC

[☆] Available only upon specific request

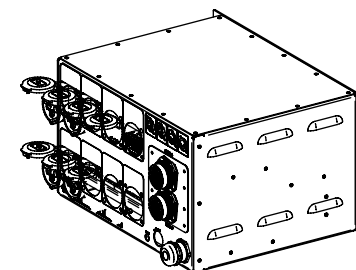

EX3
SENSE



L1
L2
L3

RCD BREAKER

EX3
RISE

EX3
ACE

Compatibility Chart

EX3
SENSE

CHAIN HOIST COMPATIBILITY

MEDIUM FRAME ULTRA COMPACT	MEDIUM FRAME COMPACT	MEDIUM FRAME	LARGE FRAME 1 REEVE	LARGE FRAME 2 REEVES	EXTRA LARGE FRAME COMPACT 1/2 REEVES	EXTRA LARGE FRAME 1/2 REEVES
						
✓	✓	✓	✓	✗	✗	✗

CONTROLLER

ALL FOR ONE SOLUTIONS



ALL FOR ONE is designed as a fully integrated system including 'smart' hoists and intelligent controllers, offering plug and play devices. It is the integration between equipment designed to operate as a 'single' stage machine.

EXE B DUAL SPEED



**DUAL SPEED FOR FAST AND
PRECISION CONTROL**

EXE D DIGITAL SYSTEM



**LOAD MONITORING /
PROTECTION & POSITION
CONTROL SYSTEM**

EXE X SMART SYSTEM



**VARIABLE SPEED SMART SYSTEM
WITH LOAD MONITORING / PROTECTION
AND POSITIONAL CONTROL**

EXE E ETC SYSTEM





**COMBINATION OF EXE FIXED SPEED
CHAIN HOISTS AND THE ETC MOTOR
CONTROL INTERFACE**




EXE K KINESYS SYSTEM



**EXE K IS AN INGENIOUS SYSTEM OBTAINED
BY THE COMBINATION OF EXE VARIABLE
SPEED CHAIN HOISTS AND THE KINESYS
CONTROL INTERFACE**

ALL FOR ONE FEATURES

	EXE 	EXE 
LINKABLE		
TOUCH SCREEN		
GROUP CONTROL		
ENCODER		
LOAD CELL		
REMOTE CONTROL		
SPEED	 DUAL FIXED SPEED	 FIXED SPEED
HARD LIMIT SWITCH	On request	On request
SOFT LIMIT SWITCH	No	UP & DOWN

EXE X	EXE K	EXE C
		
		
		
		
		
		
 MULTIPLE SELECTABLE SPEED	 VARIABLE SPEED	 FIXED SPEED
2 position	4 position	4 position
UP & DOWN	UP & DOWN	UP & DOWN



EXE B XNSB8

DUAL SPEED CONTROLLER

KEY FEATURES

8 Channels

Linkable to 64 channel (max 8 controller)

8x 16A CEE 4 pin F (hoist)
2x XLR10 (link)
8x IMLE 4 pin M (speed control)

400VAC 32A 3PH+N+E 50Hz



compatible with **XNSBRH REMOTE CONTROL**



only compatible with:
EXE B DUAL SPEED chain hoist
D8+ 500kg dual speed (2 or 8 m/min)





EXE D XNSD8

DIGITAL CONTROLLER

KEY FEATURES

8 Channels

Linkable to 64 channel (max 8 controller)

8x 16A CEE 4 pin F (hoist)
2x EtherCon (link)
8x XLR6 F (encoder)
1x XLR5 F (load cells)
1x EtherCon

400VAC 32A 3PH+N+E 50Hz



compatible with **XNSDRH REMOTE CONTROL**

only compatible with **EXE D D8+ chain hoists**



D8+
500kg



D8+
1000kg



D8+
2000kg





EXE X XNSX8

SMART CONTROLLER

KEY FEATURES

8 Channels

Linkable to 64 channel (max 8 controller)

8x 16A CEE 4 pin F (hoist)
2x EtherCon (link)
8x XLR6 F (encoder)
1x XLR5 F (load cells)
1x EtherCon

400VAC 32A 3PH+N+E 50Hz



compatible with **XNSXRH REMOTE CONTROL**

only compatible with **EXE X D8+ chain hoists**



D8+
500kg



D8+
1000kg



D8+
2000kg





EXE E is an intelligent system obtained by the combination of EXE TECHNOLOGY Fixed Speed Chain Hoists and the ETC Motor Control Interface

The “**EXE E**” system from **EXE TECHNOLOGY** represents another step forward in the stage machinery product category for the entertainment market worldwide. Through the collaboration with the company **ETC**, we have been able to build a range of chain hoist capable to communicate and be controlled by the ETC Rigging Control system range of products.



This result has been made possible, by mounting inside our chain hoist, the **ETC Rigging Motor Control Interface (MCI)**. The ETC MCI is nothing else than an electronic PLC interface that allows **EXE TECHNOLOGY fixed speed D8+ chain hoist ½ TON & 1 TON** (4 m/min or 8 m/min) equipped with encoder, limit switches and load cell to be managed and controlled by ETC Rigging Control System range of products including: QuickTouch, QuickTouch+ and Foundation.

EXE E CHAIN HOIST

D8+ 500kg



D8+ 1000kg



VARIABLE SPEED



EXE K is an ingenious system obtained by the combination of EXE Variable speed chain hoists and the Kinesys control interface.

- Both Windows PC and touchscreen console option available
- 4 Limit Switches, Incremental Encoder and optional Load Cell; Hard-wired E-Stop and Dead Man control;
- Max distance from controller to last Chain Hoist 150m (max distance depends on configuration); Temperature Range: 0° - 40°C / Humidity to 30% non-condensing;
- Electronics installed into the chain hoist body, and inverted housed in an external case for easy swap with other devices.
- Visual Status feedback on LCD;
- Data Transmitted on a XLR7 cable;
- Compatible with your pre-owned EXE K and Kinesys-converted machines;
- Remote Control available



EXE K CHAIN HOIST

D8+ 500kg



D8+ 1000kg





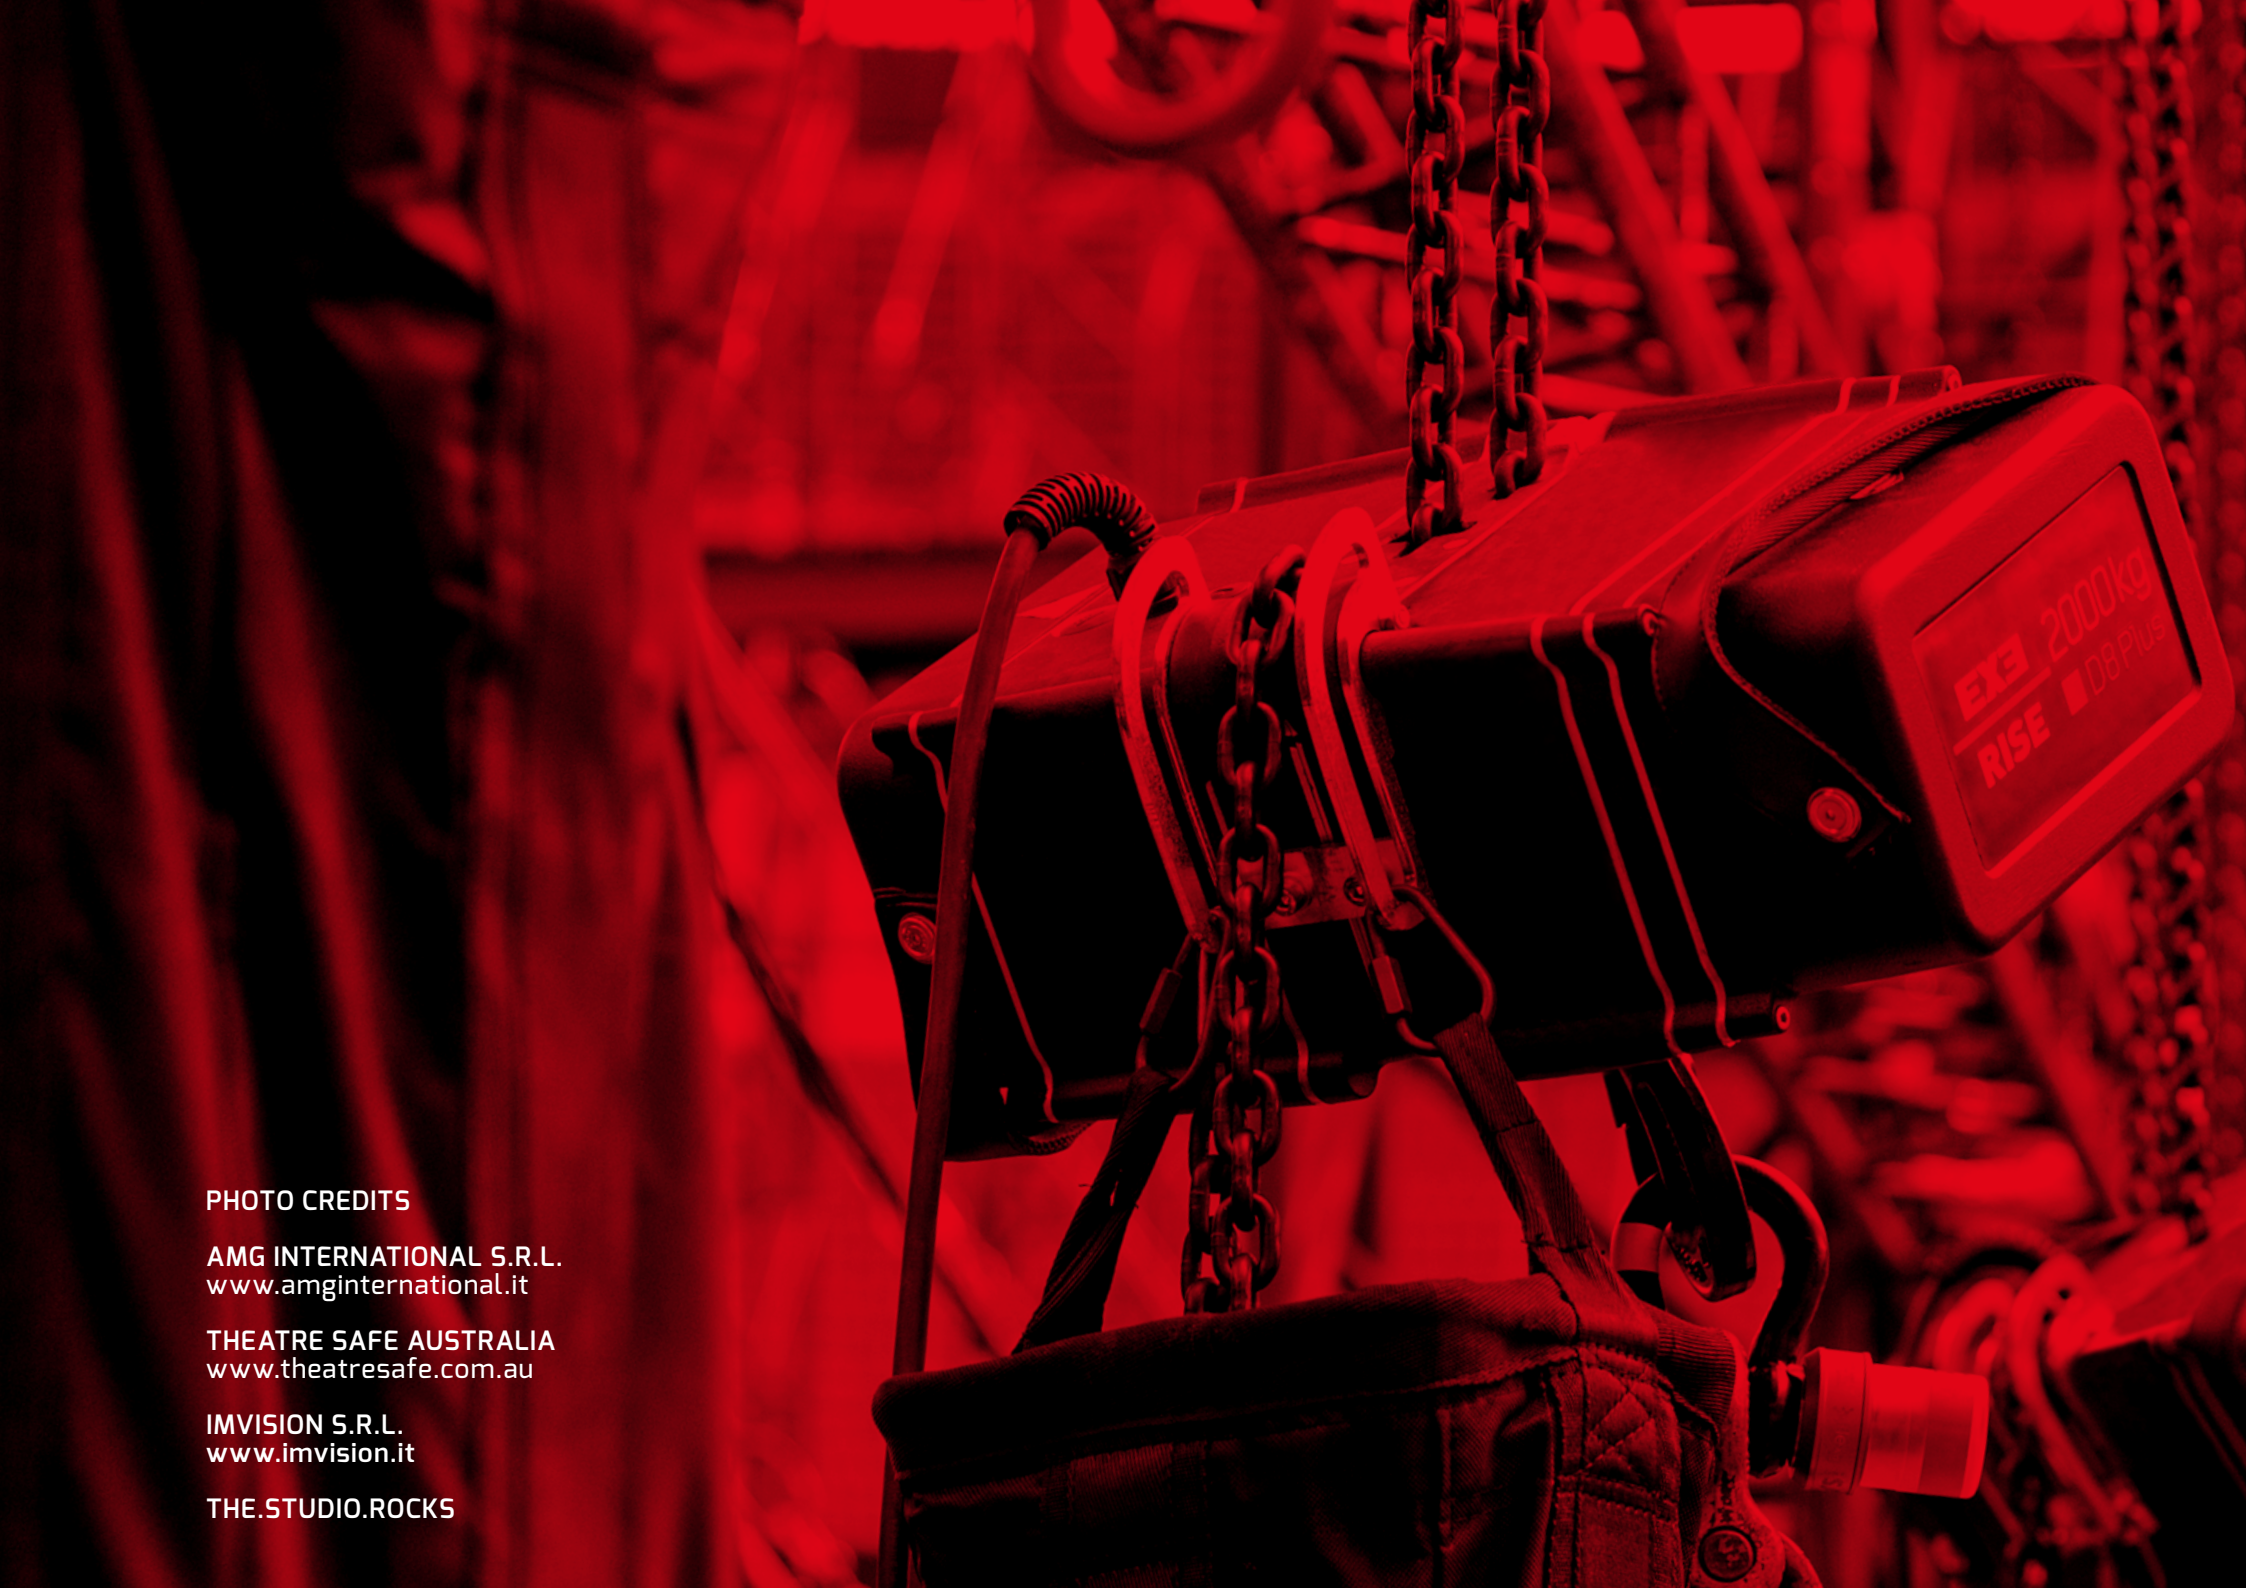


PHOTO CREDITS

AMG INTERNATIONAL S.R.L.
www.amginternational.it

THEATRE SAFE AUSTRALIA
www.theatresafe.com.au

IMVISION S.R.L.
www.imvision.it

THE.STUDIO.ROCKS





TECHNOLOGY

お問い合わせ先
ALL CREATION, INC
株式会社オールクリエーション

【本社】
〒537-0001
大阪府大阪市東成区深江北3丁目15-17
TEL : 06-6975-5006

【新宿オフィス】
〒162-0053
東京都新宿区原町3丁目19 ラーズビル6F
TEL : 044-930-0351

info@all-creation.co.jp
www.all-creation.co.jp

