



Rolling Stage

Product Specific Brochure

www.prolyte.com

Rolling Stage

STRENGTH ON WHEELS


Product description

The PROLYTE Rolling Stage is designed for versatility and ease of use, making it suitable for regular and elevated stage set-ups. Its modular, foldable design reduces set-up time and offers an efficient, customisable staging solution for events of all sizes. The load-bearing wheels enable the entire stage to be rolled with the maximum allowable load.

With the rotatable 4-way adapters, all stage configurations can be built without the necessity of changing adapters for each set-up.

Not every deck requires its own support frame. This creates open pathways beneath the stage, ideal for storage or equipment set-ups.

Technical specifications – Rolling Stage	
Alloy	EN AW-6082 T6
Main profile	70x70x4 mm
Diagonal members	50x4 mm
Deck adapter	S355 steel
Wheels	200-mm diameter

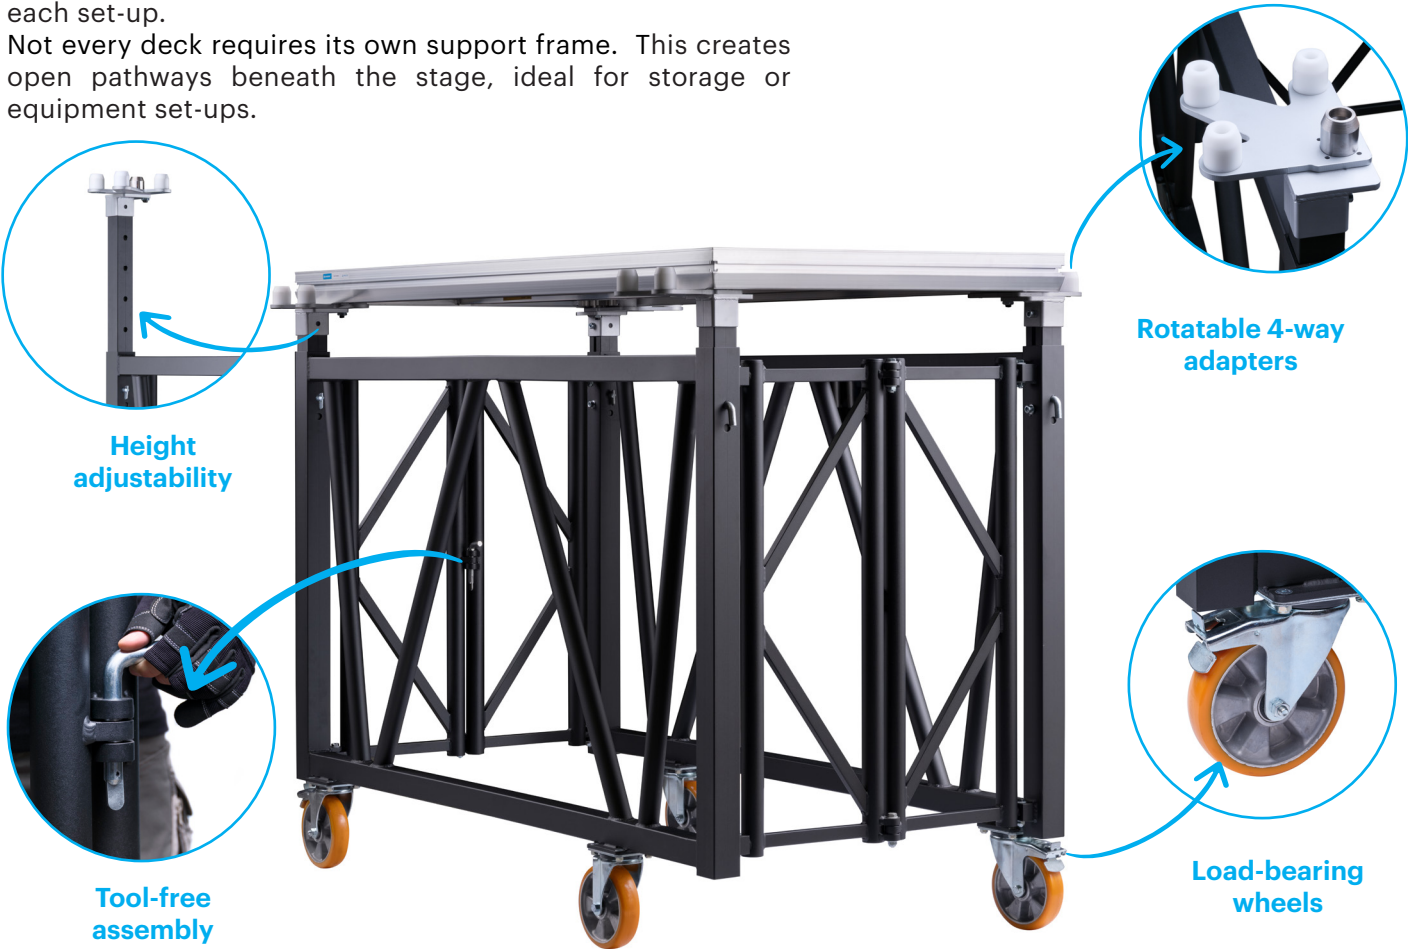

*The Rolling Stage is finished in aluminium as standard. Black powder coating is available on request.

SM-F-R series standard available frames and accessories

Item number	Code	Description
115900058	SM-FR-200100-150	Rolling frame 200x100 cm, height-adjustable from 150-200 cm
115900061	PC-SM-FR-200100-150-RAL9005	Rolling frame 200x100 cm, height-adjustable from 150-200 cm, RAL 9005
115900057	SM-FR-ADAP-04	Rolling frame 4-way rotatable adapter

SM-F-R series standard available spare parts

Item number	Code	Description
115900059	SM-FR-ADJ-LEG-02	Rolling frame extendable leg 150-220 cm
115900062	PC-SM-FR-ADJ-LEG-02-RAL9005	Rolling frame extendable leg 150-220 cm RAL9005
115310015	SM-F-A-LP16	Locking pin for EasyFrame
115330017	SM-F-C-ADAP-01	Deck-to-frame adapter 48 mm
111520084	BM-M12X035-IB	M12x035 hexagonal bolt DIN 912

Rolling Stage

Advantages:

- **Load-bearing wheels:** The wheels are load-bearing, enabling the complete stage to roll with the maximum allowable load on it.
- **Quick assembly:** Tool-free assembly enables faster and simpler set-up, minimising build times.
- **Modular base system:** Built with durable frames that form standard 200x100-cm modules for flexible stage configurations. The Rolling Stage can be double-stacked to extend the stage by 1 deck. EStages with varying heights can be built with 1 type of frame.
- **Rotatable 4-way adapters:** All stage configurations can be built without the necessity of changing adapters for each set-up.
- **Height adjustability:** The system offers height settings from 150 cm to 220 cm in 5-cm increments.
- **Foldable design:** The entire system is foldable, enhancing portability and storage efficiency.
- **Efficient use of space:** Not every deck requires its own support frame, enabling open pathways below the stage for storage or equipment set-ups.
- **Robust load capacity:** Supports up to 500 kg/m², providing the strength needed for heavy equipment and demanding setups.



お問い合わせ先
ALL CREATION,INC
株式会社オールクリエーション

【本社】
〒537-0001
大阪府大阪市東成区深江北3丁目15-17
TEL：06-6975-5006

【新宿オフィス】
〒162-0053
東京都新宿区原町3丁目19 ラーズビル6F
TEL：044-930-0351

info@all-creation.co.jp
www.all-creation.co.jp

